



7390 E-Z FORM™ EPDM-P HOSE

The most flexible hose for easy and quick installation.

Customer Value Proposition














The 7390 E-Z Form EPDM-P Hose from the Hose Products Division is the newest member of the E-Z Form hose family. Similar to the rest of the family, the 7390 is designed to handle extreme bends, kink-free performance, while providing full-flow capabilities. The 7390 hose features a highly engineered peroxide-cured EPDM tube, that is designed to ensure fluid purity, thermal resistance, and superior sealing capabilities within thermal management systems. Further enhancing its durability, the synthetic rubber cover is specially compounded for flame resistance.



PRODUCT FEATURES

- Peroxide cured EPDM tube for fluid purity
- Designed for flexibility and ease of routing
- Offered with a blue or red layline for color coding
- -40°F to +212°F (-40°C to +100°C) temperature rating
- 150 psi maximum working pressure rating
- 4:1 Safety Factor
- UL94 V-0 flame resistance rated cover
- Designed for DI water and water/glycol solutions

ENGINEERING YOUR SUCCESS.

#													
Part Number	ID (in)	ID (mm)	OD (in)	OD (mm)	B.R. (in)	B.R. (mm)	WP (psi)	WP (MPa)	Weight (lbs/ft) (kg/m)	Vacuum Rating (in HG) (kPa)	Series Cplg Rec	Std Pack Qty (ft)	Pkg Type
7390-1250100-BLYL	1.25	31.8	1.70	44.3	1.25	31.8	150	1,03	0.50 0.75	29 98	N/A	100	Coils
7390-1500100-BLYL	1.50	38.1	1.90	50.5	1.50	38.1	150	1,03	0.58 0.86	29 98	N/A	100	Coils
7390-2000100-BLYL	2.00	50.8	2.50	65.0	2.00	50.8	150	1,03	0.96 1.43	29 98	N/A	100	Coils
7390-3000100-BLYL	3.00	76.2	3.50	90.5	3.00	76.2	150	1,03	1.51 2.25	29 98	N/A	100	Coils
7390-1250100-RLYL	1.25	31.8	1.70	44.3	1.25	31.8	150	1,03	0.50 0.75	29 98	N/A	100	Coils
7390-1500100-RLYL	1.50	38.1	1.90	50.5	1.50	38.1	150	1,03	0.58 0.86	29 98	N/A	100	Coils
7390-2000100-RLYL	2.00	50.8	2.50	65.0	2.00	50.8	150	1,03	0.96 1.43	29 98	N/A	100	Coils
7390-3000100-RLYL	3.00	76.2	3.50	90.5	3.00	76.2	150	1,03	1.51 2.25	29 98	N/A	100	Coils

Tube: Black EPDM, peroxide cured
Reinforcement: Multiple textile braids or plies with wire helix
Cover: Black synthetic rubber; greek corrugated
Temperature Range: -40°F to +212°F (-40°C to +100°C)
Brand: Mylar Blue (-BLYL) or Red (-RLYL) for color coding
Brand Example: Parker Series 7390 E-Z Form EPDM-P Hose


Design Factor: 4:1
Industry Standards: UL94 V-0 flame resistance rating
Application: DI water and glycol based coolant solutions
Vacuum: Full

 **WARNING:** This product can expose you to chemicals including Carbon Black, which is known to the state of California to cause cancer. For more information go to p65.warnings.ca.gov


Complementing Products

E-Z FORM™ GS General Service Hose Series 7395

Series 7395 features a tube that is resistant to coolant mixtures, the helical wires provides full suction/vacuum capability and a path to conduct a static electrical charge to ground. The cover is resistant to abrasion, mild chemicals, heat, and ozone. The Greek corrugated cover provides minimal force-to-bend, kink resistance, and extreme flexibility to allow routing in confined spaces where formed hose is normally required.

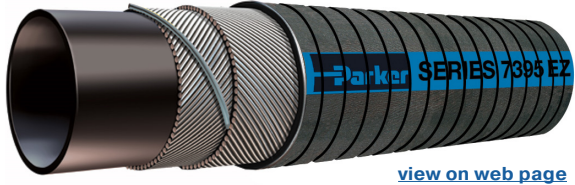

[view on web page](#)

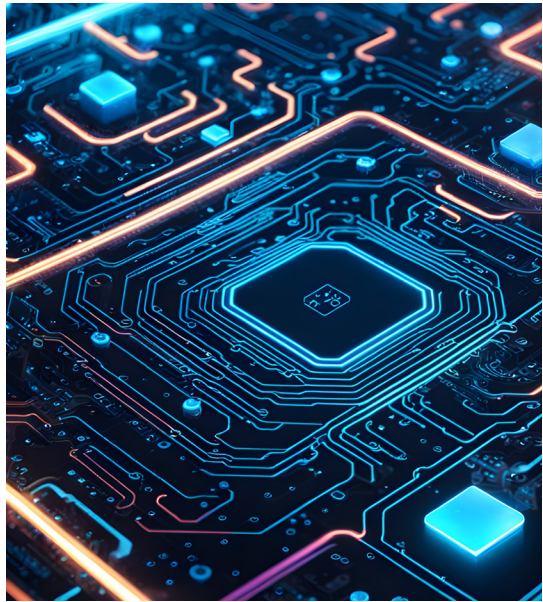

Parker Hannifin Corporation
Hose Products Division
 30240 Lakeland Blvd.
 Wickliffe, Ohio 44092
 phone 440 943 5700
 fax 440 943 3129
HPD.Support@support.parker.com

www.parker.com

© 2024 Parker Hannifin Corporation