




# 7391- EPDM-P SUCTION & DISCHARGE HOSE

## Customer Value Proposition

The 7391 EPDM-P Suction & Discharge hose is the latest addition to Hose Products Division's data center portfolio. The 7391 hose features a highly engineered peroxide-cured EPDM tube to ensure premier fluid purity, thermal resistance and superior sealing capabilities within thermal management systems. Additionally, the 7391 hose will have a completely halogen-free construction and carry the UL94 V-0 flame rating.

7391 EPDM-P delivers high-flow, fire-safe coolant transfer for data centers, CDUs, and facility applications where capacity and fluid purity matter most. This hose is reinforced with multiple textile plies and a wire helix for durability. The 7391 provides a reliable, safety-focused solution for larger-scale systems. Available in 2", 3", and 4" sizes, it is ideal for applications where maximum flexibility is less critical than achieving greater flow capacity and dependable performance.

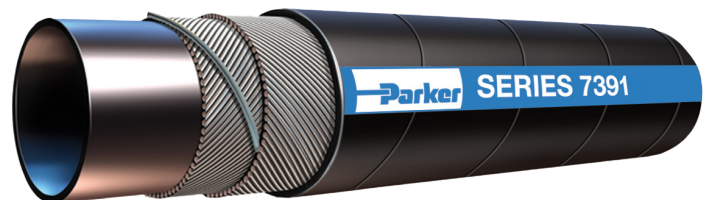

[view on web page](#)

## PRODUCT FEATURES

- Peroxide cured EPDM tube for fluid purity
- UL94 V-0 flame resistance rated cover
- 150 psi working pressure with 4:1 safety factor
- Designed for DI water and water/glycol solutions

ENGINEERING YOUR SUCCESS.

| #<br>Part<br>Number | Hose I.D. |       | Reinf<br>Layers | Hose O.D. |       | Approx Wt |      | Minimum<br>Bend Radius |     | Max WP |      | Perm<br>Cplg Rec | Nom Std<br>Pack Qty<br>ft | Pkg<br>Type |
|---------------------|-----------|-------|-----------------|-----------|-------|-----------|------|------------------------|-----|--------|------|------------------|---------------------------|-------------|
|                     | inch      | mm    |                 | inch      | mm    | lbs/ft    | kg/m | inch                   | mm  | psi    | bar  |                  |                           |             |
| 7391-2000100        | 2.0       | 50.8  | 2               | 2.56      | 65.0  | 1.09      | 1.63 | 7                      | 178 | 150    | 10.3 | N/A              | 100                       | Coils       |
| 7391-3000100        | 3.0       | 76.2  | 2               | 3.58      | 90.9  | 1.72      | 2.57 | 10                     | 254 | 150    | 10.3 | N/A              | 100                       | Coils       |
| 7391-4000100        | 4.0       | 101.6 | 2               | 4.65      | 118.1 | 2.61      | 3.89 | 22                     | 559 | 150    | 10.3 | N/A              | 100                       | Coils       |

**Tube:** Peroxide cured EPDM

**Reinforcement:** Multiple textile plies with wire helix

**Cover:** Synthetic rubber, smooth wrapped cover

**Temp. Range:** -40° F to +212° F (-40° C to +100° C)

**Brand Method:** White text on blue stripe

**Brand Example:** PARKER SERIES 7391 EPDM-P HOSE

**Design Factor:** 4:1

**Industry Standards:** UL94 V-0 flame resistance rating

**Application:** DI water and glycol based coolant solutions

**Vacuum:** Full (28")

**⚠ WARNING:** This product can expose you to chemicals including Carbon Black, which is known to the State of California to cause cancer. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

## Complementing Products


### Push-Lok EPDM-P Hose Hose Series 807/807XT

The 807/807XT hose features a highly engineered peroxide-cured EPDM tube, that is designed to ensure fluid purity, thermal resistance, and superior sealing capabilities within thermal management systems. Further enhancing its durability, the synthetic rubber cover is specially compounded for flame and ozone resistance.

This versatile hose features the unique Push-Lok seal system for easy assembly and to ensure reliable, durable, and leak-free service.



[view on web page](#)

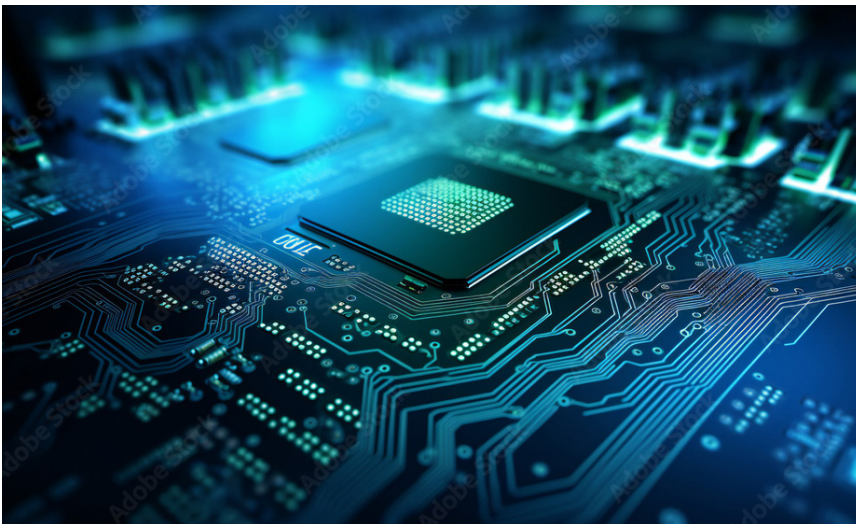

Parker Hannifin Corporation  
**Hose Products Division**  
 30240 Lakeland Blvd.  
 Wickliffe, Ohio 44092  
 phone 440 943 5700  
 fax 440 943 3129  
[HPD.Support@support.parker.com](mailto:HPD.Support@support.parker.com)

[www.parker.com](http://www.parker.com)

© 2024 Parker Hannifin Corporation