



BEVERA 10


Suction and delivery of water and non-aggressive liquids. It is recommended for loading and discharge of storage tanks, tankers, for irrigation and for all applications where a flexible and easy to handle hose is required.

Hose Construction

- Tube:** Black, smooth SBR nitrosamine free rubber compound
- Reinforcement:** Synthetic textile fabrics and embedded steel wire helix
- Cover:** Black, abrasion, ageing and weather-resistant SBR nitrosamine free rubber compound

Temperature Range

-30 °C (-22° F) to +80 °C (+176 °F)

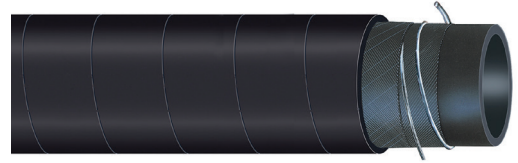

- Robust construction
- Resistant to twisting
- Nitrosamine free
- Vacuum 0.8 bar (600 mm Hg)
- Suitable for air up to 70 °C
- Design Factor 3:1



Tolerances

According to RMA steel mandrel
Refer to Technical Handbook on page TH34

Crimp Specifications

For currently qualified crimp specifications including coupling designation, refer to CrimpSource at www.parker.com/crimpsource-euro.

Part Number	I.D. (mm)	O.D. (mm)	Max. Working Pressure			Weight	min. Bend Radius
			MPa	psi	bar		
IH36214045/40	19	29	1.0	150.0	10	0.67	110
IH36214050/40	25	35	1.0	150.0	10	0.83	150
IH36214052/40	32	42	1.0	150.0	10	1.01	190
IH36214054/40	38	48	1.0	150.0	10	1.16	230
IH36214055/40	40	50	1.0	150.0	10	1.21	240
IH36214058/40	50	60	1.0	150.0	10	1.50	300
IH36214060/40	60	71	1.0	150.0	10	1.94	360
IH36214063/20	70	81.5	1.0	150.0	10	2.59	420
IH36214064/20	75	86.5	1.0	150.0	10	2.75	450
IH36214066/20	80	92.5	1.0	150.0	10	3.02	480
IH36214067/20	90	103.5	1.0	150.0	10	3.66	540
IH36214068/20	100	114	1.0	150.0	10	3.98	600
IH36211010/20	125	140	1.0	150.0	10	5.66	750

Hose layline example

RUBBER WATER HOSE BEVERA W.P. bar

