














































26 Series Fittings

 NPTF Pipe	10126 65  Male - Rigid	 JIC 37°	10326 65  Male - Rigid	10626 66  Female - Swivel	13726 66  Female - Swivel 45° Elbow - Short
13926 66  Female - Swivel 90° Elbow - Short	14126 67  Female - Swivel 90° Elbow - Long	 SAE 45°	10426 67  Male - Rigid	10826 67  Female - Swivel	17726 67  Female - Swivel 45° Elbow
17926 68  Female - Swivel 90° Elbow	 JIC 37°/ SAE 45° Dual Flare	16826 68  Female - Swivel	 Inverted Flare	12826 68  Male - Swivel	16926 69  Male - Swivel 90° Elbow
 Seal-Lok® (O-Ring Face Seal)	1JC26 69  Female - Swivel Short	1J726 70  Female - Swivel 45° Elbow	1J926 70  Female - Swivel 90° Elbow - Short	 Tube-O	1S526 70  Male - Swivel Short Pilot
15R26 71  Male - Swivel 45° Elbow - Short Pilot	15K26 71  Male - Swivel 90° Elbow - Short Pilot	15K26-PB 71  Male - Swivel 90° Elbow - Short Pilot	14526-PT 72  Male - Swivel Long Pilot	15M26-PT 72  Male - Swivel 90° Elbow - Long Pilot	15G26 72  Male - Rigid Internal - Long Pilot
15S26 72  Female - Swivel Short Pilot	15H26 73  Female - Swivel 45° Elbow - Short Pilot	15T26 73  Female - Swivel 90° Elbow - Short Pilot	15926-PB 73  Female - Swivel Long Pilot	15926-PT 73  Female - Swivel Long Pilot	15N26-PB 74  Female - Swivel 45° Elbow - Long Pilot
15N26-PT 74  Female - Swivel 45° Elbow - Long Pilot	15L26 74  Female - Swivel 90° Elbow - Long Pilot	15L26-PB 74  Female - Swivel 90° Elbow - Long Pilot	15L26-PT 75  Female - Swivel 90° Elbow - Long Pilot	15P26-PT 75  Male - Swivel 45° Elbow - Long Pilot	 Air Brake Jounce Line
17B26 75  Female - Swivel	 Compressor	15V26 76  Female - Swivel 45° Elbow	15W26 76  Female - Swivel 90° Elbow	15Z26 76  Female - Swivel 90° Elbow - Block Type	1RV26 76  Female - Swivel 135° Elbow

Use with hoses: 201, 206, 213, 221FR, 244,
266, 285, 293, SS25UL, SS25UL-AGA

26 Series Fittings

 Refrigerant Tube Mender	1T126 77  Male (w/Nut & Ferrule)	1T126 77 Fitting Assembly Instructions	14GZ 78  Male Insert O-ring Braze Nut	5SGZ 78  Female Tube-O Swivel - Short Pilot	S5GZ 78  Male Tube-O Swivel - Short Pilot
	ZJGZ 79  Male "C" Plate Seal/ O-ring Block	ZKGZ 79  Male Encapsulated Slimline Seal Block	1ZG26 79  Tube with 26 Series Coupling	1ZG26-PB 79  Tube with High Pressure Charge Port	1ZG26-PT 79  Tube with Low Pressure Charge Port
1S926 81  Female Slip-Fit Counterbore - Straight	 Brazable				


Use with hoses: 201, 206, 213, 221FR, 244,
266, 285, 293, SS25UL, SS25UL-AGA

10126

Male NPTF Pipe - Rigid

# Part Number	 Thread inch	 Hose I.D. inch	A		H		B		Additional Material Brass (B)
			inch	mm	inch	mm	inch	mm	
10126-2-4	1/8x27	3/16	1.65	42	7/16	0.78	0.78	20	
10126-4-4	1/4x18	3/16	1.88	48	9/16	1.01	1.01	26	
10126-4-5	1/4x18	1/4	1.88	48	9/16	1.01	1.01	26	
10126-4-6	1/4x18	5/16	1.88	48	3/4	1.02	1.02	26	•
10126-6-6	3/8x18	5/16	1.89	48	11/16	1.03	1.03	26	•
10126-6-8	3/8x18	13/32	1.89	48	11/16	1.03	1.03	26	•
10126-8-8	1/2x14	13/32	2.14	54	7/8	1.28	1.28	33	•
10126-8-10	1/2x14	1/2	2.25	57	7/8	1.30	1.30	33	•
10126-12-12	3/4x14	5/8	2.31	59	1-1/16	1.37	1.37	35	
10126-16-16	1x11-1/2	7/8	2.61	66	1-3/8	1.57	1.57	40	
10126-20-20	1-1/4x11-1/2	1-1/8	2.83	72	1-3/4	1.77	1.77	45	
10126-24-24	1-1/2x11-1/2	1-3/8	3.01	76	2	1.93	1.93	49	
10126-32-32	2x11-1/2	1-13/16	3.44	87	2-1/2	2.18	2.18	55	

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

10326

Male JIC 37° - Rigid

# Part Number	 Thread inch		 Hose I.D. inch	A		H		B		Additional Material Brass (B)
				inch	mm	inch	mm	inch	mm	
10326-4-4	1/4	7/16x20	3/16	2.02	50	1/2	1.15	1.15	29	•
10326-6-6	3/8	9/16x18	5/16	2.12	54	3/4	1.26	1.26	32	
10326-8-8	1/2	3/4x16	13/32	1.94	49	13/16	1.08	1.08	27	
10326-10-10	5/8	7/8x14	1/2	2.49	64	15/16	1.54	1.54	39	

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

10626

Female JIC 37° - Swivel



view on web page


#				A			B		Additional Material Brass (B)
Part Number	Thread inch		Hose I.D. inch	inch	mm	inch	inch	mm	
10626-6-6	3/8	9/16x18	5/16	1.81	45	11/16	0.95	23	•
10626-6-8	3/8	9/16x18	13/32	1.67	52	11/16	1.19	30	•
10626-12-12	3/4	1-1/16x12	5/8	2.29	58	1-1/4	1.35	34	•
10626-16-16	1	1-5/16x12	7/8	2.53	64	1-1/2	1.49	38	•
10626-20-20	1-1/4	1-5/8x12	1-1/8	2.56	65	2	1.50	38	
10626-24-24	1-1/2	1-7/8x12	1-3/8	2.77	70	2-1/4	1.69	43	
10626-32-32	2	2-1/2x12	1-13/16	3.30	84	2-7/8	2.04	52	



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

13726

Female JIC 37° - Swivel - 45° Elbow - Short Drop



view on web page


#										
Part Number	Thread inch		Hose I.D. inch	A inch	mm	E inch	mm	W inch	B inch	mm
13726-4-4	1/4	7/16x20	3/16	2.01	51	0.39	10	9/16	1.14	29
13726-6-6	3/8	9/16x18	5/16	2.72	69	0.43	11	11/16	1.86	47
13726-8-8	1/2	3/4x16	13/32	2.82	72	0.55	15	7/8	1.96	50
13726-10-10	5/8	7/8x14	1/2	2.96	75	0.63	16	1	2.01	51
13726-12-12	3/4	1-1/16x12	5/8	3.44	87	0.83	21	1-1/4	2.50	63
13726-16-16	1	1-5/16x12	7/8	3.34	85	0.90	23	1-1/2	2.30	58
13726-20-20	1-1/4	1-5/8x12	1-1/8	3.74	95	1.18	30	2	2.68	68
13726-24-24	1-1/2	1-7/8x12	1-3/8	3.92	100	1.16	29	2-1/4	2.84	72



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

13926

Female JIC 37° - Swivel - 90° Elbow - Short Drop



view on web page

#										
Part Number	Thread inch		Hose I.D. inch	A inch	mm	E inch	mm	W inch	B inch	mm
13926-4-4	1/4	7/16x20	3/16	1.82	46	0.83	21	9/16	0.95	24
13926-6-6	3/8	9/16x18	5/16	2.15	55	0.91	23	11/16	1.29	33
13926-8-8	1/2	3/4x16	13/32	2.22	56	1.09	28	7/8	1.36	35
13926-10-10	5/8	7/8x14	1/2	2.23	57	1.26	32	1	1.28	33
13926-10-12	5/8	7/8x14	5/8	2.52	64	1.23	31	1	1.58	40
13926-12-12	3/4	1-1/16x12	5/8	2.28	58	1.82	46	1-1/4	1.30	34
13926-16-16	1	1-5/16x12	7/8	3.30	84	2.14	54	1-1/2	2.26	57
13926-20-20	1-1/4	1-5/8x12	1-1/8	3.60	91	2.57	65	2	2.62	67
13926-24-24	1-1/2	1-7/8x12	1-3/8	3.92	100	2.82	72	2-1/4	2.84	72



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.


Use with hoses: 201, 206, 213, 221FR, 244,
266, 285, 293, SS25UL, SS25UL-AGA

14126

Female JIC 37° - Swivel - 90° Elbow - Long Drop

#										
Part Number	Thread inch		Hose I.D. inch	A		E		W	B	
				inch	mm	inch	mm	inch	inch	mm
14126-4-4	1/4	7/16x20	1/4	2.05	52	1.81	46	9/16	1.18	30
14126-6-6	3/8	9/16x18	5/16	2.02	51	2.13	54	11/16	1.16	29
14126-8-8	1/2	3/4x16	13/32	2.35	60	2.43	62	7/8	1.49	38
14126-10-10	5/8	7/8x14	1/2	2.11	54	2.76	70	1	1.16	29
14126-16-16	1	1-5/16x12	7/8	3.17	81	4.33	110	1-1/2	2.13	54

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

10426

Male SAE 45° - Rigid

#			A			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	inch	mm
10426-6-6	3/8	5/8x18	2.04	52	11/16	1.18	30

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

10826

Female SAE 45° - Swivel

#									Additional Material Brass (B)
Part Number	Thread inch		Hose I.D. inch		A inch mm	W inch	B inch mm		
10826-6-6	3/8	5/8x18	5/16	1.84	47	3/4	0.98	25	
10826-10-8	5/8	7/8x14	13/32	2.21	56	1	1.35	34	
10826-10-10	5/8	7/8x14	1/2	2.13	54	1	1.18	30	
10826-12-12	3/4	1-1/16x14	5/8	2.19	56	1-1/4	1.25	32	Link

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

17726

Female SAE 45° - Swivel - 45° Elbow

#										
Part Number	Thread inch		Hose I.D. inch	A		E		W	B	
				inch	mm	inch	mm	inch	inch	mm
17726-4-4	1/4	7/16x20	3/16	2.29	58	0.39	10	9/16	1.43	36
17726-6-6	3/8	5/8x18	5/16	2.72	69	0.43	11	11/16	1.86	47
17726-8-8	1/2	3/4x16	13/32	2.82	72	0.59	14	7/8	1.96	50
17726-10-10	5/8	7/8x14	1/2	2.96	75	0.63	16	1	2.01	51
17726-12-12	3/4	1-1/16x14	5/8	3.43	87	0.83	21	1-1/4	2.49	63

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

Notch on nut signifies SAE 45° flare fitting.

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

17926

Female SAE 45° - Swivel - 90° Elbow



view on web page

#	Thread	Hose I.D.	A	E	W	B
Part Number	inch	inch	inch mm	inch mm	inch	inch mm
17926-4-4	1/4 7/16x20	3/16	1.75 44	0.83 21	9/16	0.89 23
17926-6-6	3/8 5/8x18	5/16	2.15 55	0.91 23	3/4	1.29 33
17926-8-8	1/2 3/4x16	13/32	2.31 58.7	1.00 25.4	7/8	1.45 37
17926-10-10	5/8 7/8x14	1/2	2.23 57	1.26 32	1	1.28 33
17926-12-12	3/4 1-1/16x14	5/8	2.28 58	1.82 46	1-1/4	1.34 34


Notch on nut signifies 45° flare fitting.



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

16826

Female JIC 37° / SAE 45° - Dual Flare - Swivel



view on web page


#	Thread	Hose I.D.	A	W	B	Additional Material Brass (B)
Part Number	inch	inch	inch mm	inch	inch mm	
16826-4-4	1/4 7/16x20	3/16	1.67 42	9/16	0.80 20	•
16826-4-5	1/4 7/16x20	1/4	1.55 48	9/16	1.03 26	
16826-4-6	1/4 7/16x20	5/16	1.92 49	9/16	1.06 27	
16826-5-5	5/16 1/2x20	1/4	1.77 45	5/8	0.90 23	
16826-8-6	1/2 3/4x16	5/16	1.76 56	7/8	1.34 34	
16826-8-8	1/2 3/4x16	13/32	1.91 49	7/8	1.05 27	
16826-8-10	1/2 3/4x16	1/2	2.36 60	7/8	1.41 36	•
16826-10-10	5/8 7/8x14	1/2	2.17 55	1	1.23 31	•
16826-10-12	5/8 7/8x14	5/8	1.96 61	1	1.53 37	



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

12826

Male Inverted SAE 45° - Swivel



view on web page

#	Thread	Hose I.D.	A	W	B
Part Number	inch	inch	inch mm	inch	inch mm
12826-4-4	1/4 7/16x24	3/16	2.43 62	7/16	1.56 40
12826-5-5	5/16 1/2x20	1/4	2.56 65	1/2	1.69 43
12826-6-6	3/8 5/8x18	5/16	2.87 73	5/8	2.01 51
12826-8-8	1/2 3/4x18	13/32	3.00 76	3/4	2.14 54
12826-10-10	5/8 7/8x18	1/2	3.17 81	7/8	2.22 56



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

See Accessories Section for O-Rings and Flange Kits.


Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

16926

Male Inverted SAE 45° - Swivel - 90° Elbow

#										
Part Number	Thread		Hose I.D.	A		E		W	B	
	inch		inch	inch	mm	inch	mm	inch	inch	mm
16926-4-4	1/4	7/16x24	3/16	2.27	58	1.56	40	7/16	1.40	36
16926-6-6	3/8	5/8x18	5/16	1.89	48	1.48	38	5/8	1.03	26
16926-8-8	1/2	3/4x18	13/32	2.25	57	1.88	48	3/4	1.39	35

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

1JC26

Female Seal-Lok® - Swivel - Short

#											
Part Number	Thread		Hose I.D.	A		C		H	W	B	
	inch		inch	inch	mm	inch	mm	inch	inch	inch	mm
1JC26-4-4	1/4	9/16x18	3/16	1.66	42	0.31	8	9/16	11/16	0.79	20
1JC26-6-6	3/8	11/16x16	5/16	1.70	43	0.34	9	11/16	13/16	0.84	21
1JC26-8-8	1/2	13/16x16	13/32	1.76	45	0.43	11	13/16	15/16	0.90	23
1JC26-10-10	5/8	1x14	1/2	2.16	55	0.53	13	15/16	1-1/8	1.21	31
1JC26-12-12	3/4	1-3/16x12	5/8	2.13	54	0.55	14	1-1/8	1-3/8	1.19	30
1JC26-16-16	1	1-7/16x12	7/8	2.39	61	0.56	14	1-3/8	1-5/8	1.35	34
1JC26-20-20	1-1/4	1-11/16x12	1-1/8	2.45	62	0.59	15	1-7/8	1-7/8	1.39	35



view on web page


When measuring overall length to the end of the nut, $B + C$ must be used to calculate cut-off allowance.

See Accessories Section for O-Rings.

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

1J726

Female Seal-Lok® - Swivel - 45° Elbow




view on web page

#										
Part Number	Thread	Hose I.D.	A	E	W	B				
1J726-4-4	1/4	9/16x18	3/16	1.99	51	0.39	10	11/16	1.12	28
1J726-6-6	3/8	11/16x16	5/16	2.43	62	0.43	11	13/16	1.57	40
1J726-8-8	1/2	13/16x16	13/32	2.77	70	0.59	15	15/16	1.91	49
1J726-10-10	5/8	1x14	1/2	3.26	83	0.63	16	1-1/8	2.31	59
1J726-12-12	3/4	1-3/16x12	5/8	3.13	80	0.83	21	1-3/8	2.19	56
1J726-16-16	1	1-7/16x12	7/8	3.61	92	0.94	24	1-5/8	2.57	65
1J726-20-20	1-1/4	1-11/16x12	1-1/8	3.93	100	1.00	25	1-7/8	2.87	73

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

1J926

Female Seal-Lok® - Swivel - 90° Elbow - Short Drop




view on web page

#										
Part Number	Thread	Hose I.D.	A	E	W	B				
1J926-4-4	1/4	9/16x18	3/16	1.80	46	0.83	21	11/16	0.93	24
1J926-6-6	3/8	11/16x16	5/16	1.86	47	0.91	23	13/16	1.00	25
1J926-8-8	1/2	13/16x16	13/32	2.14	54	1.14	29	15/16	1.28	33
1J926-10-10	5/8	1x14	1/2	2.53	64	1.26	32	1-1/8	1.58	40
1J926-12-12	3/4	1-3/16x12	5/8	2.51	64	1.89	48	1-3/8	1.57	40
1J926-16-16	1	1-7/16x12	7/8	3.56	90	2.21	56	1-5/8	2.52	64
1J926-20-20	1-1/4	1-11/16x12	1-1/8	4.05	103	2.51	64	1-7/8	2.99	76
1J926-24-24	1-1/2	2X12	1-3/8	5.00	127	2.79	71	2-1/4	3.92	100

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

1S526

Male Tube-O - Swivel - Short Pilot



view on web page

#										
Part Number	Thread	Hose I.D.	A	D	W	B				
1S526-6-6	3/8	5/8x18	5/16	2.54	65	0.18	4,7	5/8	1.68	43
1S526-8-8	1/2	3/4x18	13/32	2.68	68	0.18	4,7	3/4	1.82	46
1S526-10-10	5/8	7/8x18	1/2	3.46	88	0.18	4,7	7/8	2.51	64
1S526-10-12	5/8	7/8x18	5/8	3.63	92	0.18	4,7	7/8	2.69	68
1S526-12-12	3/4	1-1/16x16	5/8	4.00	102	0.18	4,7	1-1/16	3.06	78

When measuring overall length to the end of the nut, B+D must be used to calculate cut-off allowance.

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

See Accessories Section for O-Rings.

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA


15R26

Male Tube-O - Swivel - 45° Elbow - Short Pilot

#													
Part Number	Thread		Hose I.D.	A		D		E		W		B	
	inch		inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
15R26-6-6	3/8	5/8x18	5/16	2.52	64	0.18	4,7	0.85	22	5/8	1.66	42	
15R26-8-8	1/2	3/4x18	13/32	2.53	64	0.18	4,7	1.05	27	3/4	1.67	42	
15R26-10-10	5/8	7/8x18	1/2	2.99	76	0.18	4,7	1.25	32	7/8	2.04	52	
15R26-10-12	5/8	7/8x18	5/8	3.16	80	0.18	4,7	1.25	32	7/8	2.22	56	



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


15K26

Male Tube-O - Swivel - 90° Elbow - Short Pilot

#													
Part Number	Thread		Hose I.D.	A		D		E		W		B	
	inch		inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
15K26-6-6	3/8	5/8x18	5/16	2.06	52	0.18	4,7	1.76	45	5/8	1.19	30	
15K26-8-8	1/2	3/4x18	13/32	2.06	52	0.18	4,7	1.74	44	3/4	1.20	30	
15K26-10-10	5/8	7/8x18	1/2	2.34	59	0.18	4,7	2.20	56	7/8	1.39	35	
15K26-10-12	5/8	7/8x18	5/8	2.51	64	0.18	4,7	2.20	56	7/8	1.57	40	



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


15K26-PB

Male Tube-O - Swivel - 90° Elbow - Short Pilot
with High Pressure Charge Port for R134a

#													
Part Number	Thread		Hose I.D.	A		D		E		G	W	B	
	inch		inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
15K26-8-8-PB	1/2	3/4x18	13/32	2.70	69	0.18	4,6	1.74	44	0.60	15	3/4	1.88



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

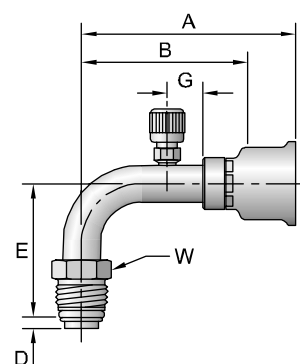


view on web page

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

14526-PT

Male Tube-O - Swivel - Long Pilot With
With Low Pressure Charge Port for R134a




[view on web page](#)

#											
Part Number	Thread inch	Hose I.D. inch	A inch	D inch	G inch	W inch	B inch				
14526-10-12-PT	5/8 7/8x18	5/8	3.45 88	0.38 9,8	0.44 11	7/8	2.51 64				

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15M26-PT

Male Tube-O - Swivel - 90° Elbow - Long Pilot
With Low Pressure Charge Port for R134a

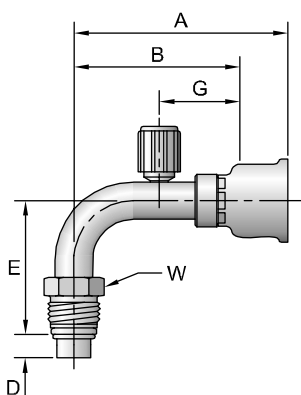


[view on web page](#)

#											
Part Number	Thread inch	Hose I.D. inch	A inch	D inch	E inch	G inch	W inch	B inch			
15M26-10-12-PT	5/8 7/8x18	5/8	3.25 83	0.38 9,8	2.25 57	0.60 15	7/8	2.31 59			

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15G26

Male Tube-O - Rigid - Internal Long Pilot (3-Step)




[view on web page](#)

#									
Part Number	Thread inch	Hose I.D. inch	A inch	H inch	B inch				
15G26-6-6	3/8 5/8x18	5/16	1.78 45	0.625 16	0.92 23				
15G26-8-8	1/2 3/4x16	13/32	1.95 50	3/4 19	1.09 28				
15G26-10-10	5/8 7/8x14	1/2	4.05 103	7/8 22	3.10 79				
15G26-10-12	5/8 7/8x14	5/8	2.19 56	0.875 22	1.25 32				

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15S26

Female Tube-O - Swivel - Short Pilot



[view on web page](#)

#										
Part Number	Thread inch	Hose I.D. inch	A inch	D inch	W inch	B inch				
15S26-6-6	3/8 5/8x18	5/16	2.54 65	0.18 4,7	3/4 19	1.68 43				
15S26-8-8	1/2 3/4x16	13/32	2.68 68	0.18 4,7	7/8 22	1.82 46				
15S26-10-10	5/8 7/8x14	1/2	2.84 72	0.18 4,7	1-1/16 25	1.89 48				
15S26-10-12	5/8 7/8x14	5/8	3.63 92	0.18 4,7	1-1/16 25	2.69 68				
15S26-12-12	3/4 1-1/16x14	5/8	4.00 102	0.18 4,7	1-1/4 32	3.06 78				

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA


15H26

Female Tube-O - Swivel 45° Elbow - Short Pilot

#	Thread	Hose I.D.	A		D		E		W	B	
Part Number	inch	inch	inch	mm	inch	mm	inch	mm	inch	inch	mm
15H26-6-6	3/8 5/8x18	5/16	2.35	60	0.18	4,7	0.54	14	3/4	1.49	38
15H26-8-8	1/2 3/4x16	13/32	2.48	63	0.18	4,7	0.60	15	7/8	1.62	41
15H26-10-10	5/8 7/8x14	1/2	3.23	82	0.18	4,7	0.67	17	1 1/16	2.28	58
15H26-10-12	5/8 7/8x14	5/8	3.43	87	0.18	4,7	0.67	17	1-1/16	2.46	62



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


15T26

Female Tube-O - Swivel - 90° Elbow - Short Pilot

#	Thread	Hose I.D.	A		D		E		W	B	
Part Number	inch	inch	inch	mm	inch	mm	inch	mm	inch	inch	mm
15T26-6-6	3/8 5/8x18	5/16	1.89	48	0.18	4,7	1.15	29	3/4	1.03	26
15T26-6-10	3/8 5/8x18	5/16	2.40	61	0.18	4,7	1.29	33	3/4	1.44	36
15T26-8-8	1/2 3/4x16	13/32	2.34	59	0.18	4,7	1.46	37	7/8	1.48	38
15T26-10-10	5/8 7/8x14	1/2	2.08	53	0.18	4,7	1.75	44	1-1/16	1.08	27
15T26-10-12	5/8 7/8x14	5/8	2.20	56	0.18	4,7	1.53	39	1-1/16	1.26	32
15T26-12-12	3/4 1-1/16x14	5/8	2.63	67	0.18	4,7	1.75	44	1-1/4	1.69	43



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


15926-PB

Female Tube-O - Swivel - Long Pilot
With High Pressure Charge Port for R134a

#	Thread	Hose I.D.	A		D		G		W	B	
Part Number	inch	inch	inch	mm	inch	mm	inch	mm	inch	inch	mm
15926-6-6-PB	3/8 5/8x18	5/16	3.25	83	0.28	7,1	0.75	19	3/4	2.39	61
15926-8-8-PB	1/2 3/4x16	13/32	2.74	70	0.38	9,8	0.50	13	7/8	1.88	48



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


15926-PT

Female Tube-O - Swivel - Long Pilot
With Low Pressure Charge Port for R134a

#	Thread	Hose I.D.	A		D		G		W	B	
Part Number	inch	inch	inch	mm	inch	mm	inch	mm	inch	inch	mm
15926-10-12-PT	5/8 7/8x14	5/8	3.47	88	0.38	9,8	0.60	15	1-1/16	2.53	64



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

15N26-PB

Female Tube-O - Swivel - 45° Elbow - Long Pilot
With High Pressure Charge Port for R134a

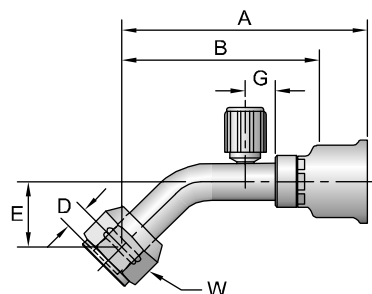


[view on web page](#)

#			A		D		E		G			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	inch	mm
15N26-8-8-PB	1/2 3/4x16	13/32	3.67	93	0.38	9,8	0.90	23	0.60	15	7/8	2.81	72

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15N26-PT

Female Tube-O - Swivel - 45° Elbow - Long Pilot
With Low Pressure Charge Port for R134a

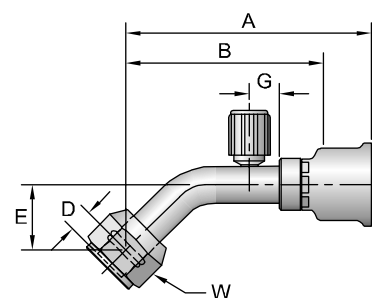


[view on web page](#)

#			A		D		E		G			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	inch	mm
15N26-10-12-PT	5/8 7/8x14	5/8	3.92	100	0.38	9,8	1.21	31	0.60	15	1-1/16	2.98	76

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15L26

Female Tube-O - Swivel - 90° Elbow - Long Pilot




[view on web page](#)

#			A		D		E				B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
15L26-8-8	1/2 3/4x16	13/32	2.14	54	0.38	9,8	1.46	37	7/8	1.28	33	

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15L26-PB

Female Tube-O - Swivel - 90° Elbow - Long Pilot
With High Pressure Charge Port for R134a

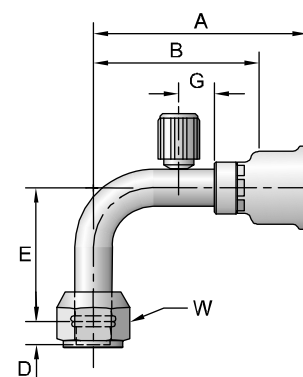

[view on web page](#)

#			A		D		E		G			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	inch	mm
15L26-6-6-PB	3/8 5/8x18	5/16	2.50	64	0.28	7,1	1.22	31	0.50	13	3/4	1.64	42
15L26-8-8-PB	1/2 3/4x16	13/32	2.80	71	0.38	9,8	1.46	37	0.60	15	7/8	1.94	49

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 201, 206, 213, 221FR, 244,
266, 285, 293, SS25UL, SS25UL-AGA


Catalog 4400 US

15L26-PT

Female Tube-O - Swivel - 90° Elbow - Long Pilot
With Low Pressure Charge Port for R134a

#													
Part Number	Thread	Hose I.D.	A	D	E	G	W	B					
15L26-10-10-PT	5/8 7/8x14	1/2	2.95 75	0.38 9,8	2.25 57	0.60 15	1-1/16	2.00 51					
15L26-10-12-PT	5/8 7/8x14	5/8	3.25 83	0.38 9,8	2.25 57	0.60 15	1-1/16	2.31 59					

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

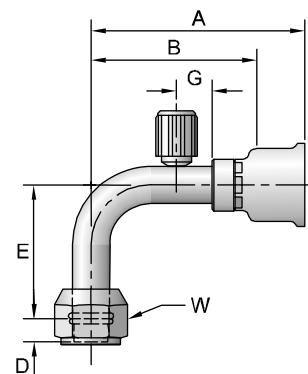


view on web page

15P26-PT

Male Tube-O - Swivel - 45° Elbow - Long Pilot
With Low Pressure Charge Port for R134a

#													
Part Number	Thread	Hose I.D.	A	D	E	G	W	B					
15P26-10-12-PT	5/8 7/8x18	5/8	3.81 97	0.38 9,8	1.21 31	0.60 15	7/8	2.87 73					

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

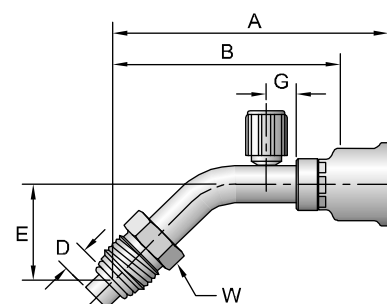


view on web page

17B26

Female Air Brake Jounce Line - Swivel

#									
Part Number	Thread	Hose I.D.	A	W	B				
17B26-8-6BA	1/2 3/4x20	5/16	1.75 44	11/16	0.89 23				
17B26-8-8BA	1/2 3/4x20	13/32	1.75 44	11/16	0.89 23				


WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page

15V26

Female Compressor - Swivel - 45° Elbow



view on web page


#									
Part Number	Thread	Hose I.D.	inch	mm	inch	mm	W	inch	B
15V26-12-8	1x14	13/32	2.72	69	0.75	19	1-1/8	1.86	47
15V26-12-12	1x14	5/8	3.39	86	0.76	19	1-1/8	2.45	62



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15W26

Female Compressor - Swivel - 90° Elbow



view on web page


#									
Part Number	Thread	Hose I.D.	inch	mm	inch	mm	W	inch	B
15W26-12-8	1x14	13/32	2.24	57	1.25	32	1.125	1.38	35
15W26-12-12	1x14	5/8	3.04	77	1.63	41	1.125	2.10	53



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

15Z26

Female Compressor - Swivel - 90° Elbow - Block Type



view on web page


#									
Part Number	Thread	Hose I.D.	inch	mm	inch	mm	W	inch	B
15Z26-12-8	1X14	13/32	1.79	45	0.80	20	1.125	0.93	24
15Z26-12-12	1X14	5/8	1.87	47	0.80	20	1.125	0.93	24



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

1RV26

Female Compressor - Swivel - 135° Elbow

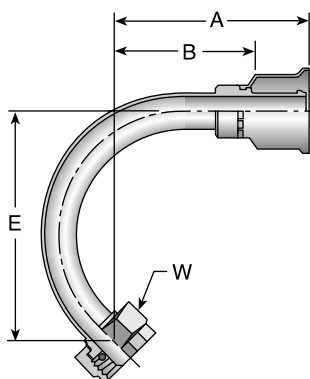

view on web page

#								
Part Number	Hose I.D.	A		E		W	B	
inch	inch	inch	mm	inch	mm	inch	inch	mm
1RV26-12-8	13/32	3.24	82	3.21	82	1-1/8	2.38	60
1RV26-12-12	5/8	2.32	59	3.21	82	1-1/8	1.38	35



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

Catalog 4400 US


1T126

Male Refrigerant Tube Mender

(with Nut and Ferrule)

# Part Number	 Thread inch		 Hose I.D. inch	 A inch mm		 H inch	 B inch mm	
1T126-6-6	3/8	5/8x18	5/16	1.96	50	11/16	1.10	28
1T126-8-8	1/2	3/4x16	13/32	2.07	53	13/16	1.21	31
1T126-10-10	5/8	7/8x14	1/2	2.28	58	15/16	1.33	34
1T126-10-12	5/8	7/8x14	5/8	2.27	58	15/16	1.33	34
1T126-12-12	3/4	1-1/16x14	5/8	2.33	59	1-1/8	1.39	35

1T126 Assembly instructions below.




[view on web page](#)

1T126

Fitting Installation Instructions

1. Cut the tube off squarely next to the hose fitting. At least 7/8" straight length is required and the outside diameter of the tube should be smooth and free from deep lengthwise scratches.
2. To prevent cutting the inside of the O-Ring, smoothly chamfer the outside diameter of the cut end 15° to 30°. Deburr the inside diameter.
3. Remove the nut, compression sleeve, and O-Ring from the fitting and lubricate the O-Ring with a lubricant that is compatible with the refrigerant used in the system.
4. Place the lubricated O-Ring in the counterbore of the fitting.
5. Slip the compression sleeve, small end, into the nut and assemble the nut on the fitting finger-tight. Make sure the compression sleeve is not cocked in the nut. Back the nut off 1/6 to 1/3 turn (one to two hex flats).
6. Insert the chamfered tube end through the nut into the fitting. If high resistance is felt when the end of the tube contacts the O-Ring, remove the tube. The end of the tube may require a large chamfer and/or the O-Ring may require more lubrication on the inside diameter. Repeat the previous steps.
7. (a) Make sure the tube is bottomed in the fitting
(b) Tighten the nut finger tight
(c) Mark the fitting and nut hex indicating the starting point (see illustration)
(d) Wrench tighten the nut 1 to 1-1/6 turns (6 to 7 hex flats).
8. Later, if it is ever necessary to loosen the connection, re-assemble the nut 1/6 turn (one hex flat) after finger tight.

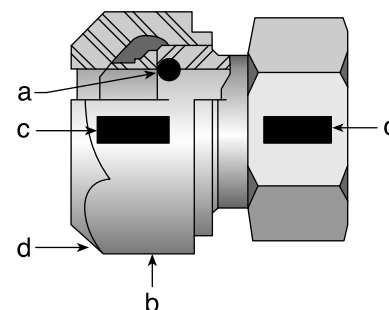


Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

Hose Products Division prides itself on delivering exceptional quality and reliability when it comes to air conditioning components. Parker's male and female end tube connections with or without a pilot as well as our 26 series fittings for hose connections were specifically designed for the rigorous requirements of automotive, mobile, bus and transit applications. Utilizing both of these types of fittings as well as our 285 hose will give you the ability to make your own custom hose tube assembly for air conditioner applications.

14GZ

Male Insert O-ring Braze Nut

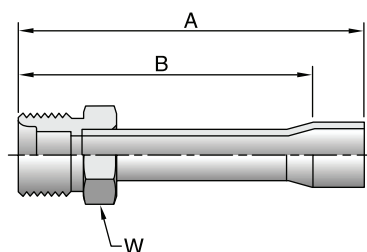


# Part Number	Thread inch		A		W inch	B	
			inch	mm		inch	mm
14GZ-6-6	3/8	5/8 - 18	4.0	101.6	5/8	3.62	92.0
14GZ-8-8	1/2	3/4 - 16	4.0	101.6	3/4	3.62	92.0
14GZ-10-10	5/8	7/8 - 14	4.0	101.6	7/8	3.62	92.0



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

5SGZ

Female Tube-O - Swivel - Short Pilot




# Part Number	Thread inch		A		D		W inch	B	
			inch	mm	inch	mm		inch	mm
5SGZ-6-6	3/8	5/8 - 18	4.0	101.6	0.18	4.7	3/4	3.62	92.0
5SGZ-8-8	1/2	3/4 - 16	4.0	101.6	0.18	4.7	7/8	3.62	92.0
5SGZ-10-10	5/8	7/8 - 14	4.0	101.6	0.18	4.7	1 1/16	3.62	92.0



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

S5GZ

Male Tube-O - Swivel - Short Pilot

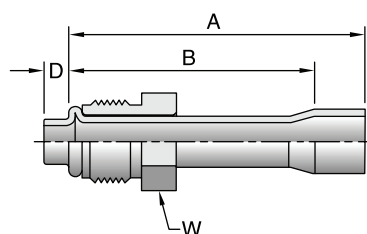

# Part Number	Thread inch		A		D		W inch	B	
			inch	mm	inch	mm		inch	mm
S5GZ-6-6	3/8	5/8 - 18	4.0	101.6	0.18	4.7	5/8	3.62	92.0
S5GZ-8-8	1/2	3/4 - 18	4.0	101.6	0.18	4.7	3/4	3.62	92.0
S5GZ-10-10	5/8	7/8 - 18	4.0	101.6	0.18	4.7	7/8	3.62	92.0



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA


Catalog 4400 US

ZJGZ

Male "C" Plate Seal / O-ring Block

# Part Number	A		R		B	
	inch	mm	inch	mm	inch	mm
ZJGZ-8-8	4.0	101.6	0.606	15.4	3.62	92.0

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

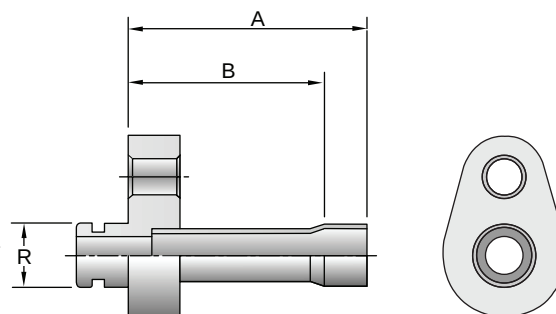


ZKGZ

Male Encapsulated Slimline Seal Block

# Part Number	A		R		B	
	inch	mm	inch	mm	inch	mm
ZKGZ-8-8	4.0	101.6	0.459	11.65	3.62	92.0

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

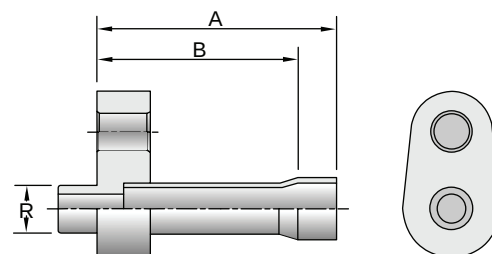


1ZG26

Tube with 26 Series Coupling

# Part Number	Hose I.D.		A		D		B	
	inch		inch	mm	inch	mm	inch	mm
1ZG26-6-6	5/16	-6	25.8	654	3/8	9.5	24	609
1ZG26-8-8	13/32	-8	25.8	654	1/2	12.7	24	609
1ZG26-10-10	1/2	-10	25.8	654	5/8	15.9	24	609

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

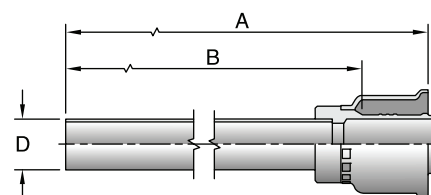


view on web page

1ZG26-PB

Tube with High Pressure Charge Port

# Part Number	Hose I.D.		A		D		Charge Port	B	
	inch		inch	mm	inch	mm		inch	mm
1ZG26-6-6-PB	5/16	-6	25.8	654	3/8	9.5	368014	24	609

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

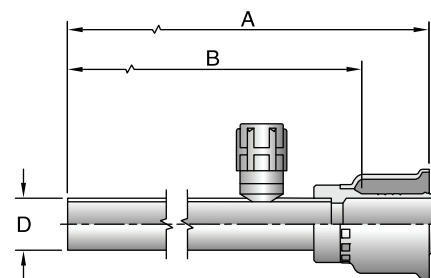

view on web page

1ZG26-PT

Tube with Low Pressure Charge Port

# Part Number	Hose I.D.		A		D		Charge Port	B	
	inch		inch	mm	inch	mm		inch	mm
1ZG26-10-10-PT	1/2	-10	25.8	654	5/8	15.9	737826	24	609

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

Instructions for Custom Hose Assembly Repairs

Learn how to select the appropriate fittings and couplings to properly prepare tube and hose assemblies that meet SAE J2064 requirements below.



1. FITTING SELECTION

The first thing to determine when making a custom hose tube assembly are the fittings to use. Utilizing both tube couplings and hose fittings will give you the ability to make your own custom hose assembly that can be bent to fit a variety of applications.

2. TUBE PREPARATION

Next you will need to cut the tube end to achieve the desired length using a Parker Klokut or similar tubing cutter. Many times, an assembly will only be repaired due to a quality issue with the fitting and doesn't require a complete replacement. In those circumstances, simply cut the tube in a location that enables you to easily replace that particular fitting. Klokut tube cutters feature a hardened and burnished tool-steel cutting wheel, flare cut-off grooves in rollers for removal of old flares and a swing-away reamer for removing internal burrs.

3. BRAZING

The third step in the assembly process is to braze both the tube coupling and hose fitting shell to each end of the tube.

4. CLEANING

After the brazed area has been cleaned and dried, it is recommended that the brazed area be spray painted to prevent rust from forming in the area where the plating on the parts was removed during the brazing process. After you've brazed the assembly, you have to clean it. To make cleaning easier, add braze cleaner to the hot water. This sudden cooling cracks the braze flux residue, making it easier to remove. Any remaining residue can be removed by careful wire brushing. Braze cleaner does not provide corrosion protection.

5. CORROSION PROTECTION

This is an extremely important step following brazing and even more so following the use of a braze cleaner. The residue left on the surface by the cleaner, especially on the I.D. of the tube, can cause rusting in carbon steel tubes rather quickly if it is not neutralized. Therefore, it is important to neutralize the cleaner residue after cleaning with a solution such as Bernite 1362 (mix 4 ounces of Bernite 136 with one gallon of water).

6. PAINTING

After the brazed area has been cleaned and dried, it is recommended that the brazed area be spray painted to prevent rust from forming in the area where the plating on the parts was removed during the brazing process.

7. BENDING TUBE END

The tube ends can be custom cut and bent after brazing.

8. HOSE SELECTION

The last step in the process is choosing the proper hose to be attached to the newly created tube assembly. Parker's 285 hose is designed specifically for the rigorous requirements automotive, mobile, bus and transit applications. This air conditioning hose has a long service life, resists moisture ingress and minimizes refrigerant permeation due to a nylon barrier. Our 285 hose is Parkrimp compatible and is available in from -4 to -12 sizes. Hoses should be cut to desired length using Parker's cut-off tool prior to crimping.


9. HOSE CRIMPING

To properly attach 26 series fittings to Parker's 285 hose, please reference CrimpSource for crimping instructions. CrimpSource is Parker's exclusive online software application that supplies you with the necessary crimp specifications in order to adhere to our strict safety standards. You can access CrimpSource by visiting www.parker.com/crimpsource

Use with hoses: 201, 206, 213, 221FR, 244, 266, 285, 293, SS25UL, SS25UL-AGA

1S926

Female Slip-Fit Counterbore for Brazing - Straight
(Inch Size Tube O.D)



view on web page

# Part Number	 Tube Size and Material	Tube Diameter R	Counter Bore Depth D	Cut-Off B	End of Shell A	Maximum Working Pressure for Fitting**	 Hose I.D.
1S926-6-6	3/8" OD x .035" wall SAE J525	0.375	0.34	1.20	2.06	2,250	3/8"
1S926-8-8	1/2" OD x .049" wall SAE J525	0.500	0.34	1.19	2.05	2,000	1/2"
1S926-8-10	1/2" OD x .049" wall SAE J525	0.500	0.34	1.21	2.17	1,750	5/8"
1S926-12-12	3/4" OD x .065" wall SAE J525	0.750	0.49	1.38	2.32	1,500	3/4"

ALL 1S926 FITTINGS ARE SHIPPED WITHOUT PLATING AND WILL REQUIRE PLATING OR PAINTING AFTER THE BRAZING PROCESS

Caution: Braze joint designed for silver braze only.

Fitting maximum working pressure rating has to be greater than or equal to the hose maximum working pressure.

**Pressure rating based on SAE J525 tubing and recommended wall thickness noted.

 **WARNING:** The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.