




























HY Series Fittings

 NPTF Pipe	101HY 186  <i>Male - Rigid</i>	113HY 186  <i>Male - Swivel</i>	11LHY 187  <i>Male - Swivel 90° Elbow</i>	102HY 187  <i>Female - Rigid</i>	 NPSM Pipe
107HY 187  <i>Female - Swivel (60° Cone)</i>	 Straight Thread	105HY 188  <i>Male - Rigid</i>	10GHY 188  <i>Male - Swivel</i>	10LHY 189  <i>Male - Swivel 90° Elbow</i>	 JIC 37°
103HY 189  <i>Male - Rigid</i>	106HY 190  <i>Female - Swivel</i>	137HY 191  <i>Female - Swivel 45° Elbow - Short</i>	139HY 191  <i>Female - Swivel 90° Elbow - Short</i>	141HY 192  <i>Female - Swivel 90° Elbow - Long</i>	 SAE 45°
108HY 192  <i>Female - Swivel</i>	177HY 193  <i>Female - Swivel 45° Elbow</i>	179HY 193  <i>Female - Swivel 90° Elbow</i>	 Flareless	111HY 193  <i>Male - Rigid</i>	 Grease Connection
1GJHY 194  <i>Female - Rigid</i>	 Inverted Flare	128HY 194  <i>Male - Swivel</i>	167HY 194  <i>Male - Swivel 45° Elbow</i>	169HY 195  <i>Male - Swivel 90° Elbow</i>	 Seal-Lok® (O-Ring Face Seal)
1J0HY 195  <i>Male - Rigid w/O-Ring</i>	1JCHY 195  <i>Female - Swivel Short</i>	1JSHY 196  <i>Female - Swivel Long</i>	1J7HY 196  <i>Female - Swivel 45° Elbow</i>	1J9HY 197  <i>Female - Swivel 90° Elbow - Short</i>	1J1HY 197  <i>Female - Swivel 90° Elbow - Long</i>
 Metric L & S	1D0HY 198  <i>Male - Rigid</i>	13DHY 198  <i>Male Standpipe Rigid</i>	 BSP	1D9HY 198  <i>Male - Rigid</i>	1GUHY 199  <i>Female - Swivel</i>
1UTHY 199  <i>Male - Rigid</i>	1XUHY 199  <i>Female - Metric Swivel</i>				

Use with hoses: 801, 836, 611HT

101HY

Male NPTF Pipe - Rigid



view on web page

#								Additional Material Stainless Steel (C)
Part Number	Thread inch	Hose I.D. inch	A inch	mm	H inch	B inch	mm	
101HY-2-4	1/8x27	1/4	2.34	59	5/8	1.00	25	
101HY-4-4	1/4x18	1/4	2.53	64	9/16	1.19	30	•
101HY-4-5	1/4x18	5/16	2.56	65	11/16	1.22	31	
101HY-4-6	1/4x18	3/8	2.55	65	11/16	1.19	30	
101HY-6-4	3/8x18	1/4	2.53	64	3/4	1.19	30	
101HY-6-5	3/8x18	5/16	2.56	65	3/4	1.22	31	
101HY-6-6	3/8x18	3/8	2.55	65	3/4	1.19	30	•
101HY-6-8	3/8x18	1/2	2.72	69	7/8	1.38	35	
101HY-8-4	1/2x14	1/4	2.72	69	7/8	1.38	35	
101HY-8-6	1/2x14	3/8	2.73	69	7/8	1.38	35	
101HY-8-8	1/2x14	1/2	2.91	74	7/8	1.41	40	•
101HY-8-10	1/2x14	5/8	2.94	75	1-1/8	1.59	40	
101HY-8-12	1/2x14	3/4	3.08	78	1-1/4	1.50	38	
101HY-12-8	3/4x14	1/2	2.91	74	1-1/16	1.56	40	
101HY-12-12	3/4x14	3/4	3.08	78	1-1/4	1.50	38	•
101HY-12-16	3/4x14	1	3.23	82	1-3/8	1.63	41	
101HY-16-12	1x11-1/2	3/4	3.27	83	1-3/8	1.69	43	
101HY-16-14	1x11-1/2	7/8	3.27	83	1-3/8	1.78	43	
101HY-16-16	1x11-1/2	1	3.42	87	1-3/8	1.81	46	•
101HY-20-20	1-1/4x11-1/2	1-1/4	3.84	98	1-3/4	2.00	51	


Stainless steel fittings must be assembled with Karrykrimp 2, Phastkrimp, Superkrimp or Parkrimp 2. See CrimpSource for more information.



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

113HY

Male NPTF Pipe - Swivel



view on web page

#									Additional Material Stainless Steel (C)	*O-Ring (W)
Part Number	Thread inch	Hose I.D. inch	A inch	mm	H inch	W inch	B inch	mm		
113HY-2-4	1/8x27	1/4	2.97	75	9/16	5/8	1.63	41		
113HY-4-4	1/4x18	1/4	3.06	78	9/16	5/8	1.72	44	•	•
113HY-4-6	1/4x18	3/8	3.17	81	11/16	11/16	1.81	46		
113HY-6-4	3/8x18	1/4	3.13	80	5/8	11/16	1.78	45		
113HY-6-6	3/8x18	3/8	3.11	79	11/16	11/16	1.75	44	•	•
113HY-6-8	3/8x18	1/2	3.31	84	7/8	7/8	1.97	50		
113HY-8-6	1/2x14	3/8	3.38	86	7/8	7/8	2.03	52		
113HY-8-8	1/2x14	1/2	3.50	89	7/8	7/8	2.16	55	•	•
113HY-12-12	3/4x14	3/4	3.95	100	1-1/4	1-1/4	2.38	60	•	•
113HY-16-16	1x11-1/2	1	4.23	107	1-1/2	1-1/2	2.63	67	•	•

Fitting allows minor movement under pressure to relieve stress on hose but is not to be used for continuous swiveling.

See Technical Section for Pressure Limitations.

*For water-based fluid applications, use the alternate O-Ring "W". See the table above for applicable part numbers and an example of the nomenclature for ordering purposes is 11343W-4-4 with the "W" after the series.



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 801, 836, 611HT


11LHY

Male NPTF Pipe - Swivel - 90° Elbow

#			A		E			B		Additional Material	O-Ring
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm	Stainless Steel (C)	(W)
11LHY-2-4	1/8x27	1/4	2.31	59	1.50	38	5/8	0.97	25		
11LHY-4-4	1/4x18	1/4	2.31	59	1.69	43	11/16	0.97	25	•	•
11LHY-6-6	3/8x8	3/8	2.33	59	1.63	41	11/16	0.97	25	•	•
11LHY-8-6	1/2x14	3/8	2.73	69	1.88	48	7/8	0.97	25		
11LHY-8-8	1/2x14	1/2	3.00	76	1.93	49	7/8	1.09	28	•	•

*For water-based fluid applications, use the alternate O-Ring "W". See the table above for applicable part numbers and an example of the nomenclature for ordering purposes is 11343W-4-4 with the "W" after the series.

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

102HY

Female NPTF Pipe - Rigid

#			A			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	inch	mm
102HY-2-4	1/8x27	1/4	2.34	59	5/8	1.00	25
102HY-4-4	1/4x18	1/4	2.47	63	11/16	1.13	29
102HY-4-6	1/4x18	3/8	2.48	63	11/16	1.13	29
102HY-6-6	3/8x18	3/8	2.48	63	7/8	1.13	29
102HY-8-6	1/2x14	3/8	2.75	70	1	1.41	36
102HY-8-8	1/2x14	1/2	2.84	72	1	1.50	38
102HY-12-12	3/4x14	3/4	2.83	72	1-1/4	1.25	32
102HY-16-16	1x11-1/2	1	3.27	83	1-1/2	1.66	42

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

107HY

Female NPSM Pipe - Swivel - (60° Cone)

#			A				B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	W inch	inch	mm
107HY-4-4	1/4x18	1/4	2.66	68	9/16	11/16	1.31	33
107HY-6-4	3/8x18	1/4	2.72	69	3/4	7/8	1.38	35
107HY-6-6	3/8x18	3/8	2.55	65	3/4	7/8	1.19	30
107HY-8-8	1/2x14	1/2	2.91	74	1	1	1.56	40
107HY-12-12	3/4x14	3/4	3.22	82	1-1/4	1-1/4	1.66	42
107HY-16-16	1x11-1/2	1	3.39	86	1-3/8	1-1/2	1.78	45

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

Use with hoses: 801, 836, 611HT

105HY

Male SAE Straight Thread with O-Ring - Rigid



view on web page


#			A			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	inch	mm
105HY-4-4	7/16x20	1/4	2.33	59	9/16	0.97	25
105HY-6-4	9/16x18	1/4	2.42	61	11/16	1.06	27
105HY-6-6	9/16x18	3/8	2.38	60	11/16	1.03	26
105HY-8-6	3/4x16	3/8	2.42	61	7/8	1.06	27
105HY-8-8	3/4x16	1/2	2.59	66	7/8	1.25	32
105HY-10-8	7/8x14	1/2	2.66	68	1	1.31	33
105HY-10-10	7/8x14	5/8	2.80	71	1-1/8	1.41	36
105HY-12-8	1-1/16x12	1/2	2.81	71	1-1/4	1.47	37
105HY-12-12	1-1/16x12	3/4	2.92	74	1-1/4	1.34	34
105HY-16-12	1-5/16x12	3/4	2.92	74	1-1/2	1.34	34
105HY-16-16	1-5/16x12	1	3.08	78	1-1/2	1.47	37



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

10GHY

Male SAE Straight Thread with O-Ring - Swivel



view on web page

#			A				B		Additional Material Stainless Steel (C)	*O-Ring (W)
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	W inch	inch	mm		
10GHY-4-4	7/16x20	1/4	3.00	76	9/16	5/8	1.66	42		
10GHY-6-6	9/16x18	3/8	3.14	80	11/16	11/16	1.78	45	•	•
10GHY-8-6	3/4x16	3/8	3.24	82	13/16	7/8	1.88	48		
10GHY-8-8	3/4x16	1/2	3.36	85	7/8	7/8	2.00	51		
10GHY-10-8	7/8x14	1/2	3.44	87	1	1	2.09	53		
10GHY-12-8	1-1/16x12	1/2	3.66	93	1-1/4	1-1/4	2.31	59		
10GHY-16-16	1-5/16x12	1	3.95	100	1-3/8	1-1/2	2.34	59	•	•

Fitting allows minor movement under pressure to relieve stress on hose but is not to be used on extensive or continuous swiveling.

*For water-based fluid applications, use the alternate O-Ring "W". See the table above for applicable part numbers and an example of the nomenclature for ordering purposes is 11343W-4-4 with the "W" after the series.



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.


O-Ring not compatible with Phosphate Ester fluids.

Use with hoses: 801, 836, 611HT

10LHY

Male SAE Straight Thread with O-Ring - Swivel - 90° Elbow

#			A		E			B		Additional Material Stainless Steel (C)	*O-Ring (W)
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm		
10LHY-6-4	9/16x18	1/4	2.31	59	1.66	42	7/8	0.97	25		
10LHY-6-6	9/16x18	3/8	2.33	59	1.66	42	11/16	0.97	25	•	•
10LHY-8-6	3/4x16	3/8	2.33	59	1.73	44	7/8	0.97	25		
10LHY-8-8	3/4x16	1/2	3.00	76	1.80	46	7/8	1.09	28	•	•
10LHY-10-8	7/8x14	1/2	3.00	76	1.88	48	1	1.09	28		
10LHY-12-12	1-1/16x12	3/4	2.77	70	2.23	57	1-1/4	1.19	30		



view on web page

Fitting allows minor movement under pressure to relieve stress on hose but is not to be used on extensive or continuous swiveling.

*For water-based fluid applications, use the alternate O-Ring "W". See the table above for applicable part numbers and an example of the nomenclature for ordering purposes is 11343W-4-4 with the "W" after the series.




WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

103HY

Male JIC 37° - Rigid

#			A			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	inch	mm
103HY-4-4	7/16x20	1/4	2.52	64	5/8	1.19	30
103HY-5-4	1/2x20	1/4	2.52	64	5/8	1.19	30
103HY-6-4	9/16x18	1/4	2.53	64	11/16	1.19	30
103HY-6-5	9/16x18	5/16	2.56	65	11/16	1.22	31
103HY-6-6	9/16x18	3/8	2.54	65	11/16	1.19	30
103HY-8-6	3/4x16	3/8	2.64	67	13/16	1.28	33
103HY-8-8	3/4x16	1/2	2.81	71	7/8	1.47	37
103HY-10-6	7/8x14	3/8	2.81	71	1	1.47	37
103HY-10-8	7/8x14	1/2	2.91	74	1	1.56	40
103HY-10-10	7/8x14	5/8	2.98	76	1-1/8	1.59	40
103HY-12-8	1-1/16x12	1/2	3.02	77	1-1/8	1.66	42
103HY-12-10	1-1/16x12	5/8	3.09	78	1-1/8	1.72	44
103HY-12-12	1-1/16x12	3/4	3.19	81	1-1/4	1.63	41
103HY-14-12	1-3/16x12	3/4	3.19	81	1-1/4	1.63	41
103HY-16-12	1-5/16x12	3/4	3.23	82	1-3/8	1.66	42
103HY-16-16	1-5/16x12	1	3.39	86	1-3/8	1.78	45



view on web page




WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 801, 836, 611HT

106HY

Female JIC 37° - Swivel



view on web page

#			A				B		Additional Material Stainless Steel (C)
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	W inch	inch	mm	
106HY-3-4	3/8x24	1/4	2.58	66	9/16	1/2	1.22	31	
106HY-4-4	7/16x20	1/4	2.60	66	9/16	9/16	1.25	32	•
106HY-4-6	7/16x20	3/8	2.67	68	3/4	9/16	1.31	33	
106HY-5-4	1/2x20	1/4	2.65	67	9/16	5/8	1.31	33	
106HY-5-5	1/2x20	5/16	2.69	68	5/8	5/8	1.34	34	
106HY-5-6	1/2x20	3/8	2.73	69	3/4	5/8	1.38	35	
106HY-6-4	9/16x18	1/4	2.67	68	9/16	11/16	1.31	33	
106HY-6-5	9/16x18	5/16	2.70	69	5/8	11/16	1.34	34	
106HY-6-6	9/16x18	3/8	2.69	68	11/16	11/16	1.34	34	•
106HY-8-6	3/4x16	3/8	2.72	69	7/8	7/8	1.38	35	
106HY-8-8	3/4x16	1/2	2.90	74	7/8	7/8	1.41	40	•
106HY-8-10	3/4x16	5/8	2.98	76	1-1/8	7/8	1.59	40	
106HY-8-12	3/4x16	3/4	3.08	78	1-1/4	7/8	1.53	39	
106HY-10-6	7/8x14	3/8	2.81	71	7/8	1	1.47	37	
106HY-10-8	7/8x14	1/2	2.98	76	1	1	1.63	41	
106HY-10-10	7/8x14	5/8	3.06	78	1-1/8	1	1.69	43	
106HY-10-12	7/8x14	3/4	3.16	80	1-1/4	1	1.59	40	
106HY-12-8	1-1/16x12	1/2	3.05	77	1-1/8	1-1/4	1.69	43	
106HY-12-10	1-1/16x12	5/8	3.12	79	1-1/8	1-1/4	1.75	44	
106HY-12-12	1-1/16x12	3/4	3.22	82	1-1/4	1-1/4	1.66	42	•
106HY-12-16	1-1/16x12	1	3.38	86	1-3/8	1-1/4	1.75	44	
106HY-14-12	1-3/16x12	3/4	3.23	82	1-1/4	1 3/8	1.66	42	
106HY-16-12	1-5/16x12	3/4	3.30	84	1-3/8	1-1/2	1.72	44	
106HY-16-14	1-5/16x12	7/8	3.30	84	1-3/8	1-1/2	1.72	44	
106HY-16-16	1-5/16x12	1	3.45	88	1-3/8	1-1/2	1.84	47	•
106HY-20-16	1-5/8x12	1	3.70	94	1-3/4	2	2.09	53	
106HY-20-20	1-5/8x12	1-1/4	4.09	104	2	2	2.25	57	

Stainless steel fittings must be assembled with Karrykrimp 2, PHastkrimp, Superkrimp or Parkrimp 2.
See CrimpSource for more information.



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.


137HY

Female JIC 37° - Swivel - 45° Elbow - Short Drop

#			A		E			B	
			inch	mm	inch	mm		inch	mm
137HY-4-4	7/16x20	1/4	2.59	66	0.39	10	9/16	1.32	34
137HY-6-4	9/16x18	1/4	2.70	69	0.43	10	3/4	1.43	36
137HY-6-6	9/16x18	3/8	2.72	69	0.43	11	11/16	1.44	37
137HY-8-6	3/4x16	3/8	2.88	73	0.58	15	7/8	1.60	41
137HY-8-8	3/4x16	1/2	3.10	79	0.59	15	7/8	1.81	46
137HY-10-8	7/8x14	1/2	3.20	81	0.63	16	1	1.91	49
137HY-10-10	7/8x14	5/8	3.29	84	0.63	16	1	1.93	49
137HY-12-12	1-1/16x12	3/4	3.82	97	0.83	21	1-1/4	2.29	58
137HY-16-16	1-5/16x12	1	4.31	109	0.89	23	1-1/2	2.69	68



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


139HY

Female JIC 37° - Swivel - 90° Elbow - Short Drop

#			A		E			B	
			inch	mm	inch	mm		inch	mm
139HY-4-4	7/16x20	1/4	2.40	61	0.83	21	9/16	1.13	29
139HY-5-4	1/2x20	1/4	2.50	64	0.83	21	5/8	1.23	31
139HY-6-4	9/16x18	1/4	2.65	67	0.91	23	3/4	1.38	35
139HY-6-6	9/16x18	3/8	2.57	65	0.91	23	11/16	1.29	33
139HY-8-6	3/4x16	3/8	2.64	67	1.14	29	7/8	1.37	35
139HY-8-8	3/4x16	1/2	2.85	72	1.14	29	7/8	1.56	40
139HY-10-8	7/8x14	1/2	3.01	76	1.26	32	1	1.72	44
139HY-10-10	7/8x14	5/8	3.09	78	1.26	32	1	1.73	44
139HY-12-10	1-1/16x12	5/8	3.61	92	1.89	48	1-1/4	2.25	57
139HY-12-12	1-1/16x12	3/4	3.68	93	1.89	48	1-1/4	2.15	55
139HY-16-12	1-5/16x12	3/4	4.33	110	2.14	54	1-1/2	2.78	71
139HY-16-16	1-5/16x12	1	4.31	109	2.31	59	1-1/2	2.69	68




WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

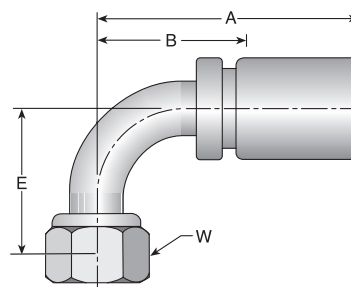

view on web page


Use with hoses: 801, 836, 611HT

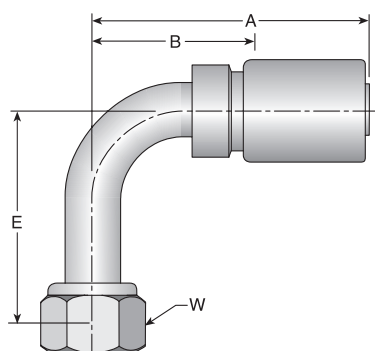141HY**Female JIC 37° - Swivel - 90° Elbow - Long Drop**

view on web page

#			A		E			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm
141HY-4-4	7/16x20	1/4	2.68	68	1.81	46	9/16	1.41	36
141HY-6-4	9/16x18	1/4	2.89	73	2.13	54	11/16	1.62	41
141HY-6-6	9/16x18	3/8	2.76	70	2.13	54	11/16	1.49	39
141HY-8-6	3/4x16	3/8	2.85	72	2.52	64	7/8	1.58	40
141HY-8-8	3/4x16	1/2	2.89	73	2.52	64	7/8	1.60	41
141HY-10-8	7/8x14	1/2	3.01	76	2.76	70	1	1.72	44
141HY-12-12	1-1/16x12	3/4	3.59	91	3.73	95	1-1/4	2.03	52
141HY-16-16	1-5/16x12	1	4.56	116	4.33	110	1-1/2	2.94	75

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

108HY**Female SAE 45° - Swivel**

view on web page


#			A				B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	W inch	inch	mm
108HY-5-5	1/2x20	5/16	2.68	68	5/8	5/8	1.34	34
108HY-6-4	5/8x18	1/4	2.73	69	11/16	3/4	1.38	35
108HY-6-5	5/8x18	5/16	2.76	70	5/8	3/4	1.41	36
108HY-6-6	5/8x18	3/8	2.75	70	11/16	3/4	1.41	36
108HY-8-8	3/4x16	1/2	2.90	74	7/8	7/8	1.56	40
108HY-8-12	3/4x16	3/4	3.17	81	1-1/4	7/8	1.59	40
108HY-12-12	1-1/16x12	3/4	3.41	87	1-1/4	1-1/4	1.84	47

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

177HY**Female SAE 45° - Swivel - 45° Elbow**

#			A		E			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm
177HY-12-12	1-1/16x14	3/4	4.03	102	0.77	20	1-1/4	2.44	62

 **WARNING:** The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

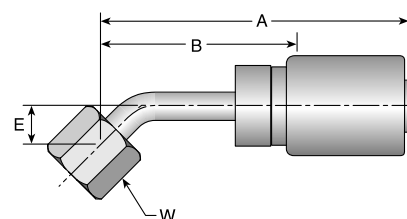


[view on web page](#)

179HY**Female SAE 45° - Swivel - 90° Elbow**

#			A		E			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm
179HY-6-6	5/8x18	3/8	3.23	82	0.86	22	3/4	1.88	48

 **WARNING:** The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

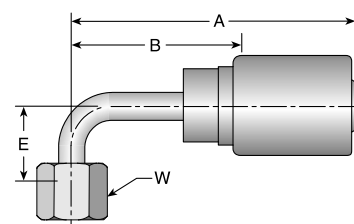


[view on web page](#)

111HY**Male Ferulok Flareless - Rigid
(24° Cone w/Nut and Ferrule)**

#			A				B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	inch	inch	mm
111HY-4-4	7/16x20	1/4	2.42	61	9/16	9/16	1.06	27
111HY-6-6	9/16x18	3/8	2.45	62	11/16	11/16	1.09	28
111HY-8-6	3/4x16	3/8	2.61	66	7/8	7/8	1.25	32
111HY-8-8	3/4x16	1/2	2.72	69	7/8	7/8	1.38	35
111HY-10-8	7/8x14	1/2	2.78	71	1	1	1.44	37
111HY-12-12	1-1/16x12	3/4	3.02	77	1-1/4	1-1/4	1.44	37

The Parker Ferrule-Fix fitting makes it possible to salvage the bent tube section from a hose assembly for quick, easy on the job repairs. For additional information see Ferrule-Fix installation instructions in the Technical Section.


 **WARNING:** The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



[view on web page](#)

1GJHY

**Female Grease Connection - SPL - PTF Taper
Thread - Rigid - 1/2x27**




view on web page

#							
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	inch	mm
1GJHY-8-4	1/2x27	1/4	2.41	61	3/4	1.06	27

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

128HY

Male Inverted SAE 45° - Swivel




view on web page

#							
Part Number	Thread inch	Hose I.D. inch	inch	mm	W inch	inch	mm
128HY-4-4	7/16x24	1/4	3.28	83	7/16	1.94	49
128HY-6-5	5/8x18	5/16	3.75	95	5/8	2.41	61
128HY-6-6	5/8x18	3/8	3.73	95	5/8	2.38	60

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

167HY

Male Inverted SAE 45° - Swivel - 45° Elbow

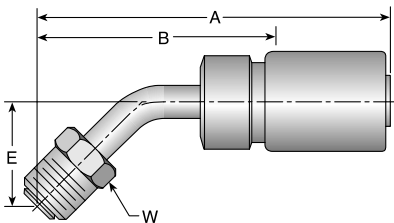

view on web page

#							
Part Number	Thread inch	Hose I.D. inch	inch	mm	E inch	mm	W inch
167HY-6-6	5/8x18	3/8	4.16	106	0.94	24	5/8
							inch
							mm
							inch
							mm

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Use with hoses: 801, 836, 611HT


Catalog 4400 US

169HY

Male Inverted SAE 45° - Swivel - 90° Elbow

#			A		E			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm
169HY-5-4	1/2x20	1/4	3.52	89	1.66	42	1/2	2.16	55
169HY-6-6	5/8x18	3/8	4.03	102	1.69	43	5/8	2.69	68

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

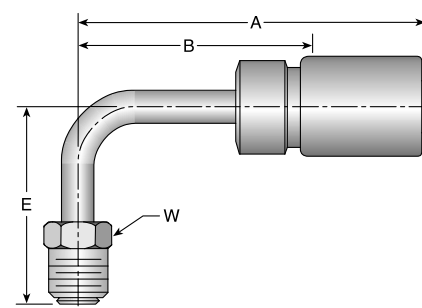

view on web page


1JOHY

Male Seal-Lok® - Rigid - (with O-Ring)

SAE J516 (Apr2016)

#			A			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	inch	mm
1JOHY-4-4	9/16x18	1/4	2.36	60	5/8	1.00	25
1JOHY-6-6	11/16x16	3/8	2.49	63	3/4	1.13	29
1JOHY-8-8	13/16x16	1/2	2.69	68	7/8	1.34	34
1JOHY-12-8	1-3/16x12	1/2	2.91	74	1-1/4	1.56	40

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


1JCHY

Female Seal-Lok® - Swivel - Short

ISO 12151-1 - SWSA

#			A		C				B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	inch	mm
1JCHY-4-4	9/16x18	1/4	2.61	66	0.31	7.8	9/16	11/16	0.94	24
1JCHY-6-6	11/16x16	3/8	2.69	68	0.34	8.7	11/16	13/16	0.94	24
1JCHY-8-8	13/16x16	1/2	2.91	74	0.43	11.0	7/8	15/16	1.13	29
1JCHY-12-12	1-3/16x12	3/4	3.31	84	0.55	14.0	1-1/4	1-3/8	1.13	29

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.




view on web page

See Accessories Section for O-Rings.

Use with hoses: 801, 836, 611HT

1JSHY

Female Seal-Lok® - Swivel - Long
ISO 12151-1 - SWSB



view on web page


#			A				B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	W inch	inch	mm
1JSHY-4-4	9/16x18	1/4	2.59	66	9/16	11/16	1.25	32
1JSHY-6-4	11/16x16	1/4	2.67	68	5/8	13/16	1.31	33
1JSHY-6-5	11/16x16	5/16	2.70	69	5/8	13/16	1.34	34
1JSHY-6-6	11/16x16	3/8	2.75	70	11/16	13/16	1.34	34
1JSHY-8-6	13/16x16	3/8	2.84	72	7/8	15/16	1.50	38
1JSHY-8-8	13/16x16	1/2	2.95	75	7/8	15/16	1.59	40
1JSHY-10-8	1x14	1/2	3.16	80	15/16	1-1/8	1.81	46
1JSHY-10-10	1x14	5/8	3.17	81	1-1/8	1-1/8	1.78	45
1JSHY-10-12	1x14	3/4	3.27	83	1-1/4	1-1/8	1.69	43
1JSHY-12-10	1-3/16x12	5/8	3.20	81	1-1/8	1-3/8	1.81	46
1JSHY-12-12	1-3/16x12	3/4	3.30	84	1-1/4	1-3/8	1.72	44
1JSHY-16-12	1-7/16x12	3/4	3.44	87	1-3/8	1-5/8	1.88	48
1JSHY-16-16	1-7/16x12	1	3.59	91	1-3/8	1-5/8	1.97	50
1JSHY-20-16	1-11/16x12	1	3.47	88	1-5/8	1-7/8	1.75	59
1JSHY-20-20	1-11/16x12	1-1/4	3.98	101	1-3/4	1-7/8	2.16	55



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

1J7HY

Female Seal-Lok® - Swivel - 45° Elbow
ISO 12151-1 - SWE45

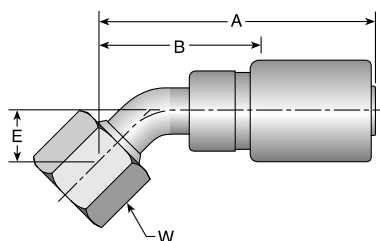

view on web page

#			A		E			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	W inch	inch	mm
1J7HY-4-4	9/16x18	1/4	2.59	66	0.39	10	11/16	1.32	34
1J7HY-6-4	11/16x16	1/4	2.70	69	0.43	11	13/16	1.43	36
1J7HY-6-6	11/16x16	3/8	2.72	69	0.43	11	13/16	1.44	37
1J7HY-8-4	13/16x16	1/4	2.95	75	0.59	15	15/16	1.68	43
1J7HY-8-6	13/16x16	3/8	2.89	73	0.59	15	15/16	1.62	41
1J7HY-8-8	13/16x16	1/2	3.10	79	0.59	15	15/16	1.81	46
1J7HY-10-8	1x14	1/2	3.20	81	0.63	16	1-1/8	1.91	49
1J7HY-10-10	1x14	5/8	3.29	84	0.63	16	1-1/8	1.93	49
1J7HY-12-12	1-3/16x12	3/4	3.82	97	0.83	21	1-3/8	2.29	58
1J7HY-16-16	1-7/16x12	1	4.55	116	0.97	25	1-5/8	2.94	75



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

See Accessories Section for O-Rings.


1J9HY

Female Seal-Lok® - Swivel - 90° Elbow - Short Drop
ISO 12151-1 - SWES90

#			A		E			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm
1J9HY-4-4	9/16x18	1/4	2.40	61	0.83	21	11/16	1.13	29
1J9HY-4-6	9/16x18	3/8	3.08	78	0.83	21	11/16	1.72	44
1J9HY-6-4	11/16x16	1/4	2.65	67	0.91	23	13/16	1.38	35
1J9HY-6-5	11/16x16	5/16	3/14	80		23	13/16	1.72	44
1J9HY-6-6	11/16x16	3/8	2.57	65	0.91	23	13/16	1.29	33
1J9HY-8-6	13/16x16	3/8	2.64	67	1.14	29	15/16	1.37	35
1J9HY-8-8	13/16x16	1/2	2.85	72	1.14	29	15/16	1.56	40
1J9HY-10-8	1x14	1/2	3.01	76	1.26	32	1-1/8	1.72	44
1J9HY-10-10	1x14	5/8	3.09	78	1.26	32	1-1/8	1.73	44
1J9HY-10-12	1x14	3/4	3.52	89	1.33	34	1-1/8	1.97	50
1J9HY-12-10	1-3/16x12	5/8	3.61	92	1.89	48	1-3/8	2.25	57
1J9HY-12-12	1-3/16x12	3/4	3.68	93	1.89	48	1-3/8	2.15	55
1J9HY-16-12	1-7/16x12	3/4	4.27	108	2.25	57	1-5/8	2.69	68
1J9HY-16-16	1-7/16x12	1	4.45	113	2.25	57	1-5/8	2.84	72



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

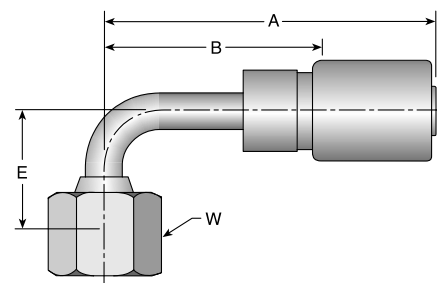

view on web page


1J1HY

Female Seal-Lok® - Swivel - 90° Elbow - Long Drop
ISO 12151-1 - SWEL90

#			A		E			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	mm
1J1HY-4-4	9/16x18	1/4	2.68	68	1.81	46	11/16	1.41	36
1J1HY-6-6	11/16x16	3/8	2.76	70	2.13	54	13/16	1.49	38
1J1HY-8-8	13/16x16	1/2	2.94	75	2.52	64	15/16	1.65	42
1J1HY-10-10	1x14	5/8	3.42	87	2.76	70	1-1/8	2.03	52



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

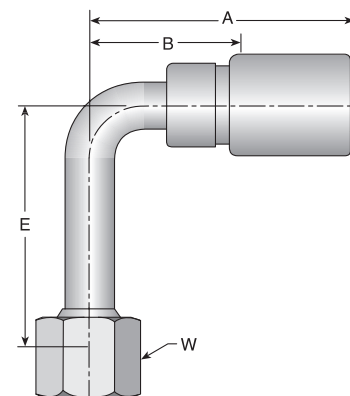


view on web page

See Accessories Section for O-Rings.

Use with hoses: 801, 836, 611HT

1D0HY

Male Metric L - Rigid - (24° Cone) ISO 12151-2




view on web page

#								
Part Number	Thread	mm	Hose I.D.	inch	mm	H	inch	mm
1D0HY-15-6	15	M22x1.5	3/8	2.52	64	24	1.16	29

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

13DHY

Male Standpipe Metric S - Rigid End Connection per ISO 8434-1-SDS

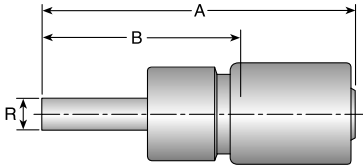


view on web page

#						
Part Number	R	Hose I.D.	inch	mm	inch	mm
13DHY-16-8	16	1/2	3.53	90	2.16	55
13DHY-30-16	30	1	4.15	105	2.53	64

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

1D9HY

Male BSP Parallel Pipe - Rigid - (60° Cone) ISO 228-1



view on web page

#							
Part Number	Thread	Hose I.D.	inch	mm	H	inch	mm
1D9HY-8-8	1/2x14	1/2	2.83	72	1-1/16	1.47	37

When used in a port, a bonded seal must be used.
See Accessories Section for more information.

WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Metric L: Mates with EO "L" Series Fittings.
Metric S: Mates with EO "S" Series Fittings.

1GUHY


Female BSP Parallel Pipe - Swivel - (60° Cone)

ISO 228-1

#			A				B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	W inch	inch	mm
1GUHY-4-4	1/4x19	1/4	2.62	67	9/16	11/16	1.28	33
1GUHY-6-4	3/8x19	1/4	2.69	68	3/4	7/8	1.34	34
1GUHY-6-6	3/8x19	3/8	2.70	69	3/4	7/8	1.34	34
1GUHY-8-6	1/2x14	3/8	2.84	72	7/8	1	1.50	38
1GUHY-8-8	1/2x14	1/2	3.02	77	7/8	1	1.66	42
1GUHY-12-12	3/4x14	3/4	3.25	83	1-1/4	1-1/4	1.69	43
1GUHY-16-16	1x11	1	3.45	88	1-3/8	1-1/2	1.84	47



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


1UTHY

Male BSP Taper Pipe - Rigid - (60° Cone)

#			A			B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	H inch	inch	mm
1UTHY-2-4	1/8x28	1/4	2.34	59	9/16	1.00	25



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page


1XUHY

Female Metric Swivel - (30° Flare)

#			A				B	
Part Number	Thread mm	Hose I.D. inch	inch	mm	H mm	W mm	inch	mm
1XUHY-10-10	24 M24x1.5	5/8	3.22	82	30	30	1.84	47
1XUHY-12-12	30 M30x1.5	3/4	3.31	84	32	38	1.75	44
1XUHY-16-16	33 M33x1.5	1	3.62	92	36	41	2.00	51



WARNING: The products described in this catalog can expose you to chemicals, including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



view on web page

Use with hoses: 801, 836, 611HT