

Shell

Page Ce-1

100IF

Ce-1



No-Skive shell


Flange

Page Ce-2 – Ce-3

15


Ce-2

**ISO 6162-1-Flange
Straight**

 ISO 12151-3-S-L – SFL
(21.0 MPa/ 3000 psi)
**17**


Ce-2

**ISO 6162-1 Flange
45° Elbow**

 ISO 12151-3 - E45 - L – SFL 45°
(21.0 MPa/ 3000 psi)
**19**

Ce-3

**ISO 6162-1-Flange
90° Elbow**

 ISO 12151-3 - E - L – SFL 90°
(21.0 MPa/ 3000 psi)

 Crimp Diameters please find on www.parker.com/crimpsource-euro

100IF No-Skive shell



Only for use with
adjustable crimpers.



Part Number	Hose I.D.				Hose Type
	DN	Inch	Size	mm	
100IF-32-TUBE	50	2"	-32	50,8	EZ-Form; Carburite 10
100IF-40	63	2 1/2"	-40	63,5	811; 811S, EZ-Form, Carburite 10
100IF-40-TUBE	63	2 1/2"	-40	63,5	EZ-Form; Carburite 10
100IF-48	76	3"	-48	76,2	811; 811S, EZ-Form, Carburite 10
100IF-56	90	3 1/2"	-56	88,9	811S
100IF-64	100	4"	-64	101,6	811S
100IF-80	127	5"	-80	127	811S
100IF-96	152	6"	-96	152,4	811S

Approved **fitting series** for **hose types**, depending on size:



15 ISO 6162-1-Flange Straight

ISO 12151-3-S-L – SFL
(21.0 MPa/ 3000 psi)

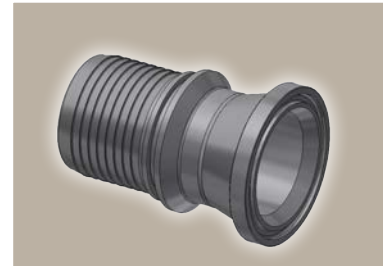
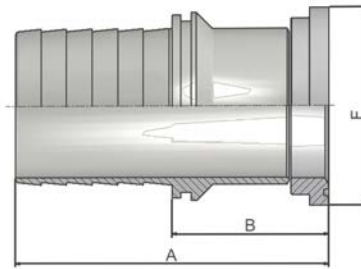


Part Number	Hose I.D.				Flange Inch	A mm	B mm	F mm
	DN	Inch	Size	mm				
K15IF-24-32	50	2"	-32	50,8	1 1/2"	115	59	60,3
K15IF-32-32	50	2"	-32	50,8	2"	117	61	71,4
K15IF-32-40	63	2 1/2"	-40	63,5	2"	119	57	71,4
K15IF-40-40	63	2 1/2"	-40	63,5	2 1/2"	119	57	84,1
K15IF-48-40	63	2 1/2"	-40	63,5	3"	124	62	101,5
K15IF-48-48	76	3"	-48	76,2	3"	167	96	101,5
K15IF-56-56	90	3 1/2"	-56	88,9	3 1/2"	183	91	114,3
K15IF-64-64	100	4"	-64	101,6	4"	206	103	127,0
K15IF-80-80	127	5"	-80	127,0	5"	221	118	152,4
K15IF-80-96	152	6"	-96	152,4	5"	291	151	152,4

To select corresponding half-flange and O-ring see section Eb.

17 ISO 6162-1 Flange 45° Elbow

ISO 12151-3 – E45 – L – SFL 45°
(21.0 MPa/ 3000 psi)

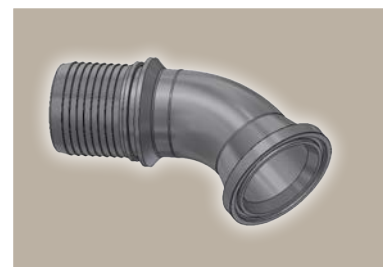

Part Number	Hose I.D.				Flange Inch	A mm	B mm	E mm	F mm
	DN	Inch	Size	mm					
K17IF-40-40	63	2 1/2"	-40	63,5	2 1/2"	163	110	47	84,1
K17IF-48-48	76	3"	-48	76,2	3"	223	152	54	101,5
K17IF-56-56	90	3 1/2"	-56	88,9	3 1/2"	258	166	50	114,3
K17IF-64-64	100	4"	-64	101,6	4"	292	189	57	127,0
K17IF-80-80	127	5"	-80	127,0	5"	341	238	92	152,4
K17IF-80-96	152	6"	-96	152,4	5"	411	271	92	152,4

SAE flange halves see in section Eb.

Fittings with standard O-ring seals can be used for temperatures from -40 °C up to +105 °C.
O-rings see section Eb. Special O-rings are available on request.


Approved **fitting series** for **hose types**, depending on size:



19

ISO 6162-1-Flange 90° Elbow

ISO 12151-3 - E- L – SFL 90°
(21.0 MPa/ 3000 psi)

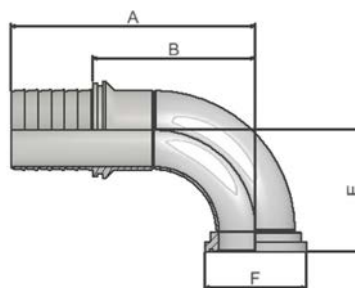

Part Number	Hose I.D.				Flange Inch	A mm	B mm	E mm	F mm
	DN	Inch	Size	mm					
K19IF-20-32-SL95	50	2"	-32	50,8	1 1/4"	118	62	95	50,8
K19IF-24-32-SL120	50	2"	-32	50,8	1 1/2"	137	81	120	60,3
K19IF-32-32-SL100	50	2"	-32	50,8	2"	143	87	100	71,4
K19IF-32-32-SL250	50	2"	-32	50,8	2"	143	87	250	71,4
K19IF-32-40-SL105	63	2 1/2"	-40	63,5	2"	136	74	105	71,4
K19IF-32-40-SL240	63	2 1/2"	-40	63,5	2"	161	99	240	71,4
K19IF-40-32-SL106	50	2"	-32	50,8	2 1/2"	143	87	106	84,1
K19IF-40-32-SL290	50	2"	-32	50,8	2 1/2"	143	87	290	84,1
K19IF-40-40	63	2 1/2"	-40	63,5	2 1/2"	161	108	110	84,1
K19IF-40-40-SL200	63	2 1/2"	-40	63,5	2 1/2"	161	108	200	84,1
K19IF-48-40-SL123	63	2 1/2"	-40	63,5	3"	136	74	123	101,5
K19IF-48-40-SL230	63	2 1/2"	-40	63,5	3"	161	99	230	101,5
K19IF-48-48	76	3"	-48	76,2	3"	225	154	132	101,5
K19IF-56-40	63	2 1/2"	-40	63,5	3 1/2"	161	108	125	114,3
K19IF-56-56	90	3 1/2"	-56	88,9	3 1/2"	275	183	137	114,0
K19IF-80-80	127	5"	-80	127,0	5"	361	258	241	152,4
K19IF-80-96	152	6"	-96	152,4	5"	431	291	241	152,4

SAE flange halves see in section Eb.

Fittings with standard O-ring seals can be used for temperatures from -40 °C up to +105 °C.

O-rings see section Eb. Special O-rings are available on request.

Approved **fitting series** for **hose types**, depending on size:

