




IDRO 10

Suitable for discharge of water and non-aggressive liquids, for agricultural uses, also in industrial facilities and on building sites.

Hose Construction

- Tube:** Black, smooth SBR nitrosamine free rubber compound
- Reinforcement:** Synthetic textile fabrics
- Cover:** Black: abrasion, ageing and weather-resistant SBR nitrosamine free rubber compound

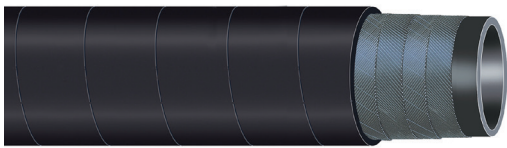

- Robust construction
- Resistant to twisting
- Nitrosamine free
- Design Factor 3:1



Temperature Range

-30 °C (-22 °F) to +80 °C (+176 °F)

Tolerances

According to RMA steel mandrel
Refer to Technical Handbook on page TH34

Part Number			 Max. Working Pressure			 Weight	 min. Bend Radius
	I.D. (mm)	O.D. (mm)	MPa	psi	bar	kg/m	mm
IH36203000/40	25	34	1.0	150.0	10	0.63	250
IH36203002/40	30	41	1.0	150.0	10	0.92	300
IH36203003/40	32	44	1.0	150.0	10	1.07	320
IH36203005/40	38	52	1.0	150.0	10	1.46	380
IH36203006/40	40	54	1.0	150.0	10	1.52	400
IH36203011/40	60	82	1.0	150.0	10	3.63	600

Hose layline example