



THERMOPRESS 10


Suitable for delivery of hot water, non-aggressive hot liquids and steam to a maximum temperature of +120 °C (+248 °F). To connect boilers to air conditioning units and for hot water cleaning systems.

Hose Construction

- Tube:** Black, smooth, heat resistant, EPDM nitrosamine free rubber compound
- Reinforcement:** Synthetic textile fabrics or yarns
- Cover:** Black, smooth, heat, ageing and weather-resistant EPDM nitrosamine free rubber compound

Temperature Range

-40 °C (-40 °F) to +100 °C (+212 °F),
with peaks +120 °C (+248 °F)

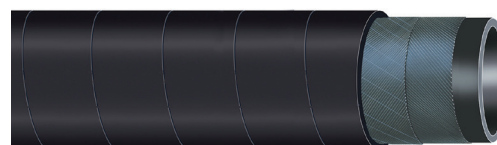

- Robust structure
- Wide temperature range
- Nitrosamine free
- Design Factor 4:1



Tolerances

I.D. ≤ 20 mm according to UNI EN ISO 1307
I.D. > 20 mm according to RMA steel mandrel
Refer to Technical Handbook on page TH34

Part Number	I.D. (mm)	O.D. (mm)	Max. Working Pressure			Weight	min. Bend Radius
			MPa	psi	bar		
IH36800002/100	12	22.5	1.0	150.0	10	0.38	120
IH36800003/80	15	25.5	1.0	150.0	10	0.44	150
IH36800004/80	18	28.5	1.0	150.0	10	0.51	180
IH36800005/80	20	30.5	1.0	150.0	10	0.56	200
IH36800006/40	25	35	1.0	150.0	10	0.61	250
IH36800009/40	40	54	1.0	150.0	10	1.34	400

Hose layline example

