

VINITRESS

For delivery of foodstuff in general industrial purposes and for agriculture applications.


Hose Construction

Flexible, transparent PVC hose having a textile reinforcement between the walls.

Temperature Range

-20 °C (-4 °F) TO +60 °C (140 °F)

sterilization at 130 °C for short periods

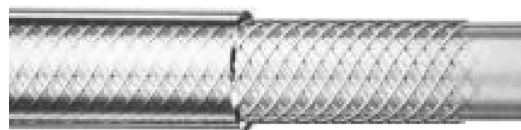

- According to European Directive EU 10/2011 Class A, B and C
- Low duty mission profile
- Transparent structure to visually monitor the passage of media
- Design Factor 3:1

Tolerances

Refer to Technical Handbook on page TH34

Part Number	 I.D. (mm)	 O.D. (mm)	 Max. Working Pressure				 Weight	 min. Bend Radius
			MPa	psi	bar	kg/m		mm
IH35033229/100	6	12	2.0	300.0	20	0.10		40
IH35033230/100	8	14	2.0	300.0	20	0.13		50
IH35033223/50	9	15	2.0	300.0	20	0.14		50
IH35033231/100	10	16	2.0	300.0	20	0.15		60
IH35033220/50	13	19	1.2	174.0	12	0.18		80
IH35033222/50	15	21	1.2	174.0	12	0.21		90
IH35033221/50	19	26	1.0	150.0	10	0.30		110
IH35033245/50	25	33	0.8	116.0	8	0.44		150
IH35033241/25	32	42	0.7	101.5	7	0.71		190
IH35033240/25	40	50	0.6	87.0	6	0.86		240

Hose layline example

VINITRESS  FOOD QUALITY - MADE IN ITALY - PARKER