

Shell

Page Dh-1

100WB

Dh-1

**Interlock
In-/Outside Skive**
BPK Hose



DIN – Metric

Page Dh-2

C9

Dh-2

**Female Metric 24° - Swivel
Heavy Series with O-Ring
Straight**
ISO 12151-2-SWS-S – DKOS




BSP

Page Dh-3

92

Dh-3

**Female BSP Parallel Pipe
Swivel - Straight (60° Cone)**
BS5200-A – DKR




SAE

Page Dh-4

01


Dh-4

**Male NPTF Pipe
Rigid – Straight**
SAE J476A / J516 – AGN



100WB Interlock In-/Outside Skive

BPK Hose



Only for use with
adjustable crimpers.



Part Number	 Hose I.D.				B mm
	DN	Inch	Size	mm	
100WB-6	10	3/8	-6	9.5	47.0
100WB-8	12	1/2	-8	12.7	52.5
100WB-12	19	3/4	-12	19.1	61.0
100WB-16	25	1	-16	25.4	74.5

Approved **fitting series** for hose types:

	WB	BPK
---	-----------	-----

C9 Female Metric 24° - Swivel Heavy Series with O-Ring Straight

ISO 12151-2-SWS-S – DKOS

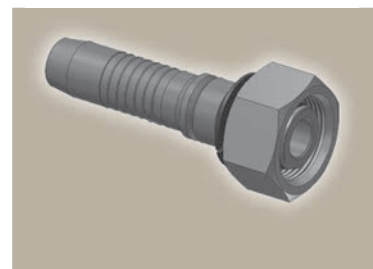

Part Number	Hose I.D.				Thread metric	Tube O.D. mm	A mm	B mm	W mm
	DN	Inch	Size	mm					
KC9WB-14-6	10	3/8	-6	9.5	M22x1.5	14	72	23	27
KC9WB-16-8	12	1/2	-8	12.7	M24x1.5	16	85	32	30
KC9WB-25-12	19	3/4	-12	19.1	M36x2	25	95	34	46
KC9WB-30-16	25	1	-16	25.4	M42x2	30	108	36	50

Fittings with standard O-ring seals can be used for temperatures from -40 °C up to +105 °C.
O-rings see section Eb. Special O-rings are available on request.



Approved **fitting series** for hose types:

WB BPK

92

Female BSP Parallel Pipe Swivel - Straight (60° Cone)

BS5200-A - DKR

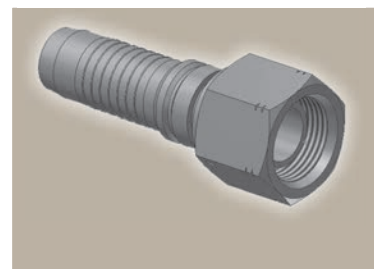



Part Number	Hose I.D.				Thread BSP	A mm	B mm	W mm
	DN	Inch	Size	mm				
K92WB-6-6	10	3/8	-6	9.5	3/8x19	72	23	22
K92WB-8-8	12	1/2	-8	12.7	1/2x14	79	26	27

Approved **fitting series** for hose types:

WB BPK

01 **Male NPTF Pipe
Rigid – Straight**
SAE J476A / J516 – AGN

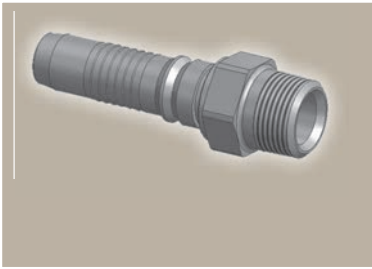

Part Number	 Hose I.D.				 Thread NPTF	A mm	B mm	 H mm
	DN	Inch	Size	mm				
K01WB-6-6	10	3/8	-6	9.5	3/8-18	77	28	19
K01WB-8-8	12	1/2	-8	12.7	1/2-14	90	37	22
K01WB-12-12	19	3/4	-12	19.1	3/4-14	98	36	30
K01WB-16-16	25	1	-16	25.4	1-11 1/2	114	41	36

Approved **fitting series** for hose types:

	BPK
--	-----